客戶版

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	N\A	NEW	DEAN.SHEN	\	JASON	2014.10.20

SPECIFCATIONS:
Contact current Rating:
1.5 Amperes
Dielectric Withstanding Voltage:AC 150V(RMS)
Insulation resistance:1000Megohms Minimum.
Contact Resistance:
30mΩ Max
50mΩMax for other contacts
Mechanical Characteristics:
Mating Force:35 Newtoms.Maximum
Unmating Force:10 Newtoms.MInimum.

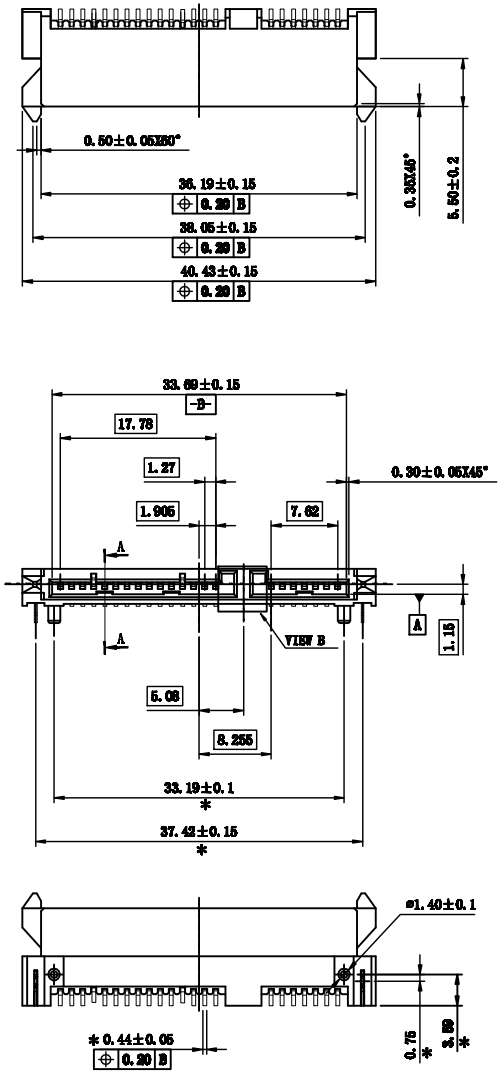

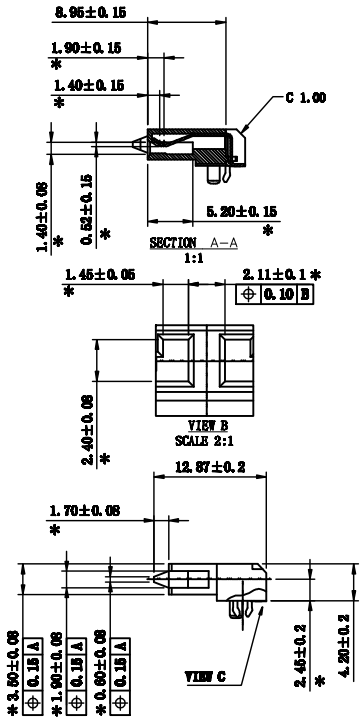

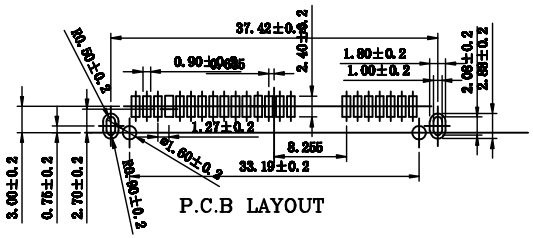

P.C.B LAYOUT

2	FORK	2	C2601R-H T=0.25 Contact Plating Au,Solder Area Matte Sn
2	CONTACT1	15	C5191R-H T=0.25 Contact Plating Au,Solder Area Matte Sn
1	HOUSING	1	LCP +30%G.F. BLACK UL94V-0

深圳市连欣科技有限公司

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)

MM		INCH	
.X	±0.35	.X	±—
.XX	±0.25	.XX	±—
.XXX	±0.15	.XXX	±—

ANGULAR ±1°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DRAWN BY DATE: Dean Oct.20.2014
CHECKED BY DATE
APPROVED BY DATE

TITLE: SATA 7+15P F 板上 H4.2 SMT

THIRD ANGLE PROJECTION

CUSTOMER COPY

PART NO. XUTS-2205-0429
DWG NO.
SHEET NO. 1/1