
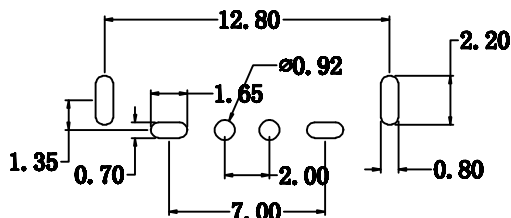
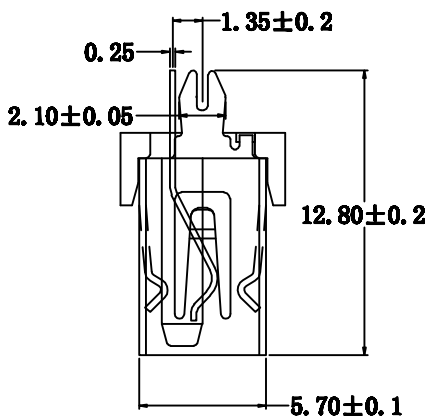
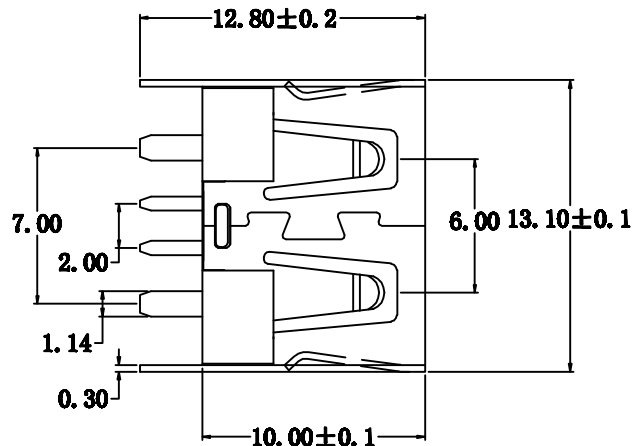


RoHS Compliant

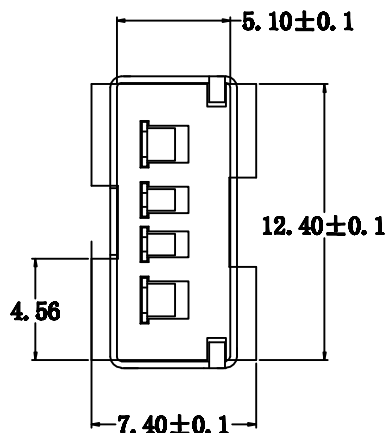

**规格说明:Specifications:**

**电气特性:Electrical:**

1. 额定电流: Current Rating  
5A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触阻抗: Contact Resistance  
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:  
1000MEGA ohms MIN

**物理性能:Mechanical:**

1. 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf (MAX)  
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention  
1.2kgf (MIN)

**原材料:Material:**

1. 塑胶: Housing:  
High Temperature Thermoplastics,  
UL 94V-0 PBT White/Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

**电镀:Finish:**

1. 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Tails
2. 外壳: Shell:  
Nickel Plating

**深圳市连欣科技有限公司**

图号 (DWG NO)			单位 (UNIT): MM
版本 (REV)		A/0	比例 (SCALE) 1:1
日期 (DATE)		2015.06.09	⊕ ⊖
设计 (DESIGN)			未注公差 TOLERANCE UNSPECIFIED
审核 (CHECKED)		~	LX ±0.30 LXX ±0.30 LXXX ±0.10 R ±5° LR ±2°
核准 (APPROVED)			
品名 (ITEM NO)	USB A/F 180度 10.0大电流无边		
料号 (PART NO)	XUDF-012-0107D		
模号 (MODEL NO)	N/A		