




3D VIEW

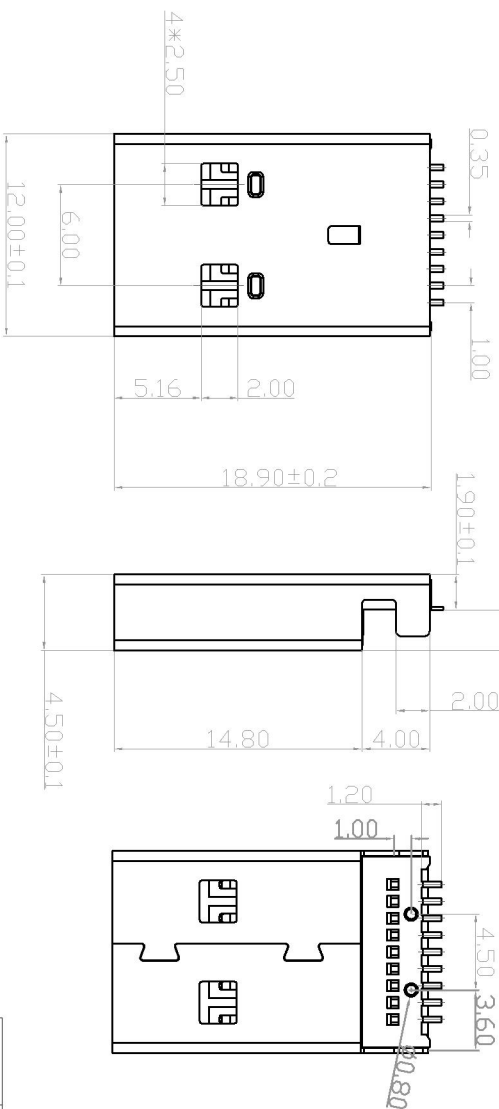

PIN NUMBER	SIGNAL NAME
PIN 1	Vbus
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	SiDA_SSRX-
PIN 6	SiDA_SSRX+
PIN 7	GND_DRAIN
PIN 8	SiDA_SSTX-
PIN 9	SiDA_SSTX+
SHELL	GND

RECOMMEND PCB LAYOUT(±0.05)

REV	ECN NO.	DESCRIPTION	DATE	DESIGN
AO		HD	22.05.31	LZR

NOTES:

- MATERIAL:
 - HOUSING: LCP ,COLOR IS BLUE;
 - CONTACT: BRASS,T=0.2mm;
 - SHELL: SPCC,T=0.30mm;
- ELECTRICAL:
 - VOLTAGE RATING: 30 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 30MILLOHMS MAX.;
 - WITHSTAND VOLTAGE: 500 VAC RMS
- INSULATION RESISTANCE: 100MEG OHMS MIN @500V DC;
- MECHANICAL:
 - MATING FORCE: 35N MAX.;
 - UNMATING FORCE: 5~35N;
 - OPERATING LIFE: 1500 CYCLES MIN.;
- FINISH:
 - TERMINAL: CONTACT AREA: GOLD PLATED G/Fu"; SOLDER AREA: PLATED OVER TIN;
 - SHELL: NI PLATED OVER ALL ;
- ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE:-40°C~+85°C;
 - OPERATION TEMPERATURE RANGE:-25°C~+70°C;
 - SALT SPRAY TEST:24H(Excluding riveted bends)

序号	品名	材质	电镀/颜色	备注
C	外壳	SPCC	镀锌	
B	端子	黄铜H65	焊锡区镀锡 接触区镀金(1u)	
A	基座	LCP	蓝色	

深圳市连欣科技有限公司

UNLESS OTHERWISE SPECIFIED: NAME: 3.0 A公称板式直脚中轴(带定位柱) PART NO: XUSM-0930-2139
 GENERAL TOLERANCE: X.xxx ±0.10 DWG NO: USIM-139
 X.xx ±0.20
 X.x ±0.30

THIRD ANGLE PROJECTION	UNIT:	SCALE	SIZE:	SHEET:	REV.:
	mm	1:1	A4	1/1	AO

ANGULAR: X.xx' ±1' DRAWN: CHECKED: APPROVED
 X.x' ±5'
 X.' ±5'