

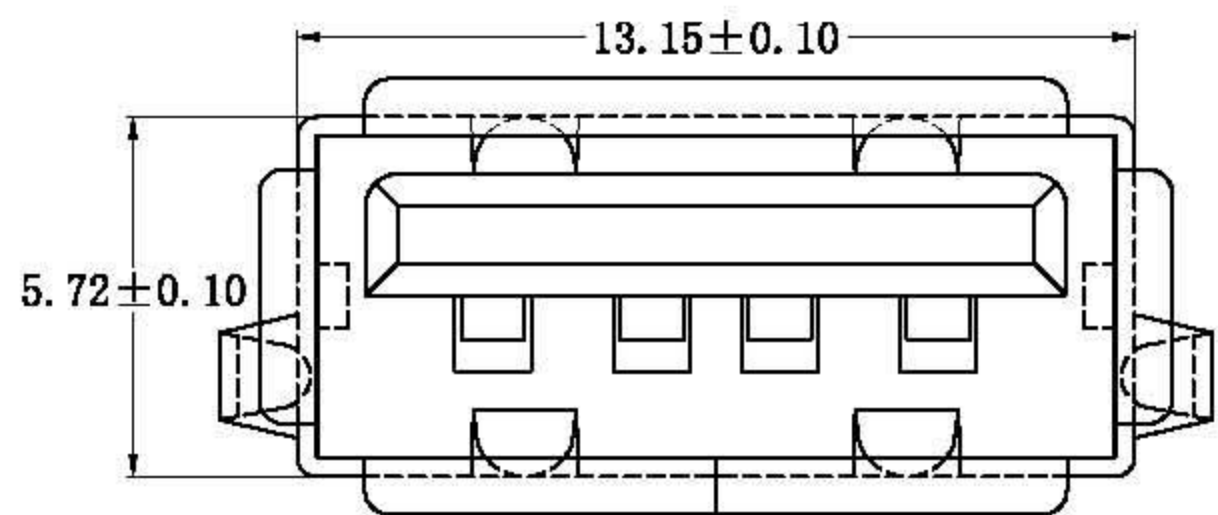


1 2 3 4 5 6 7

A

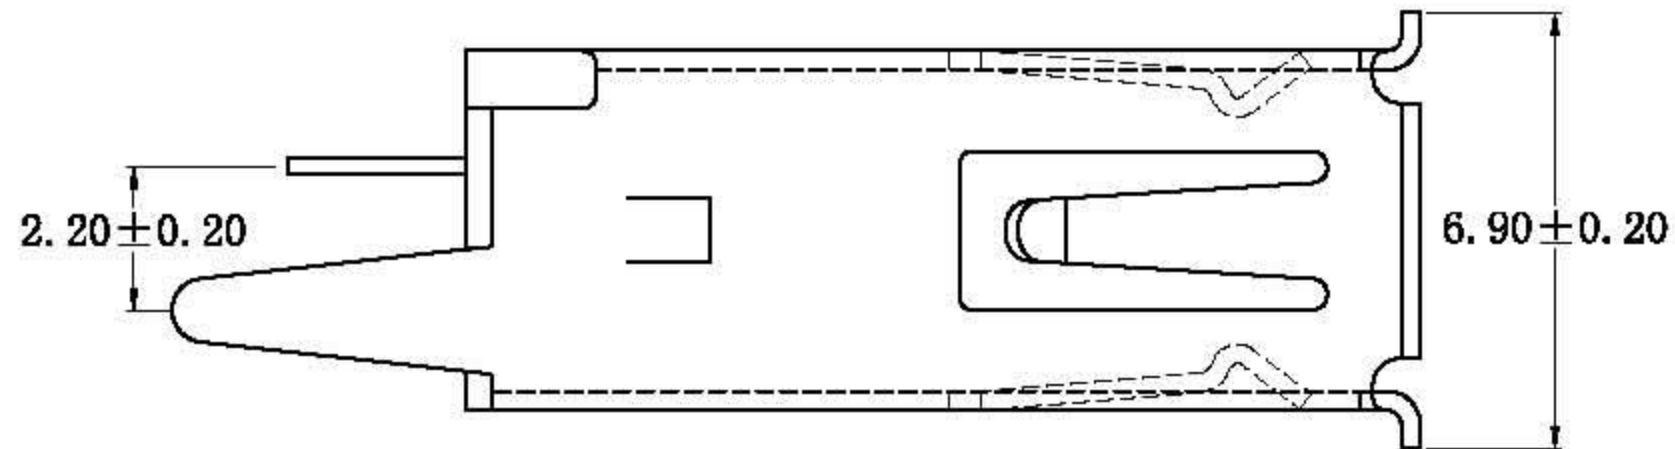

B

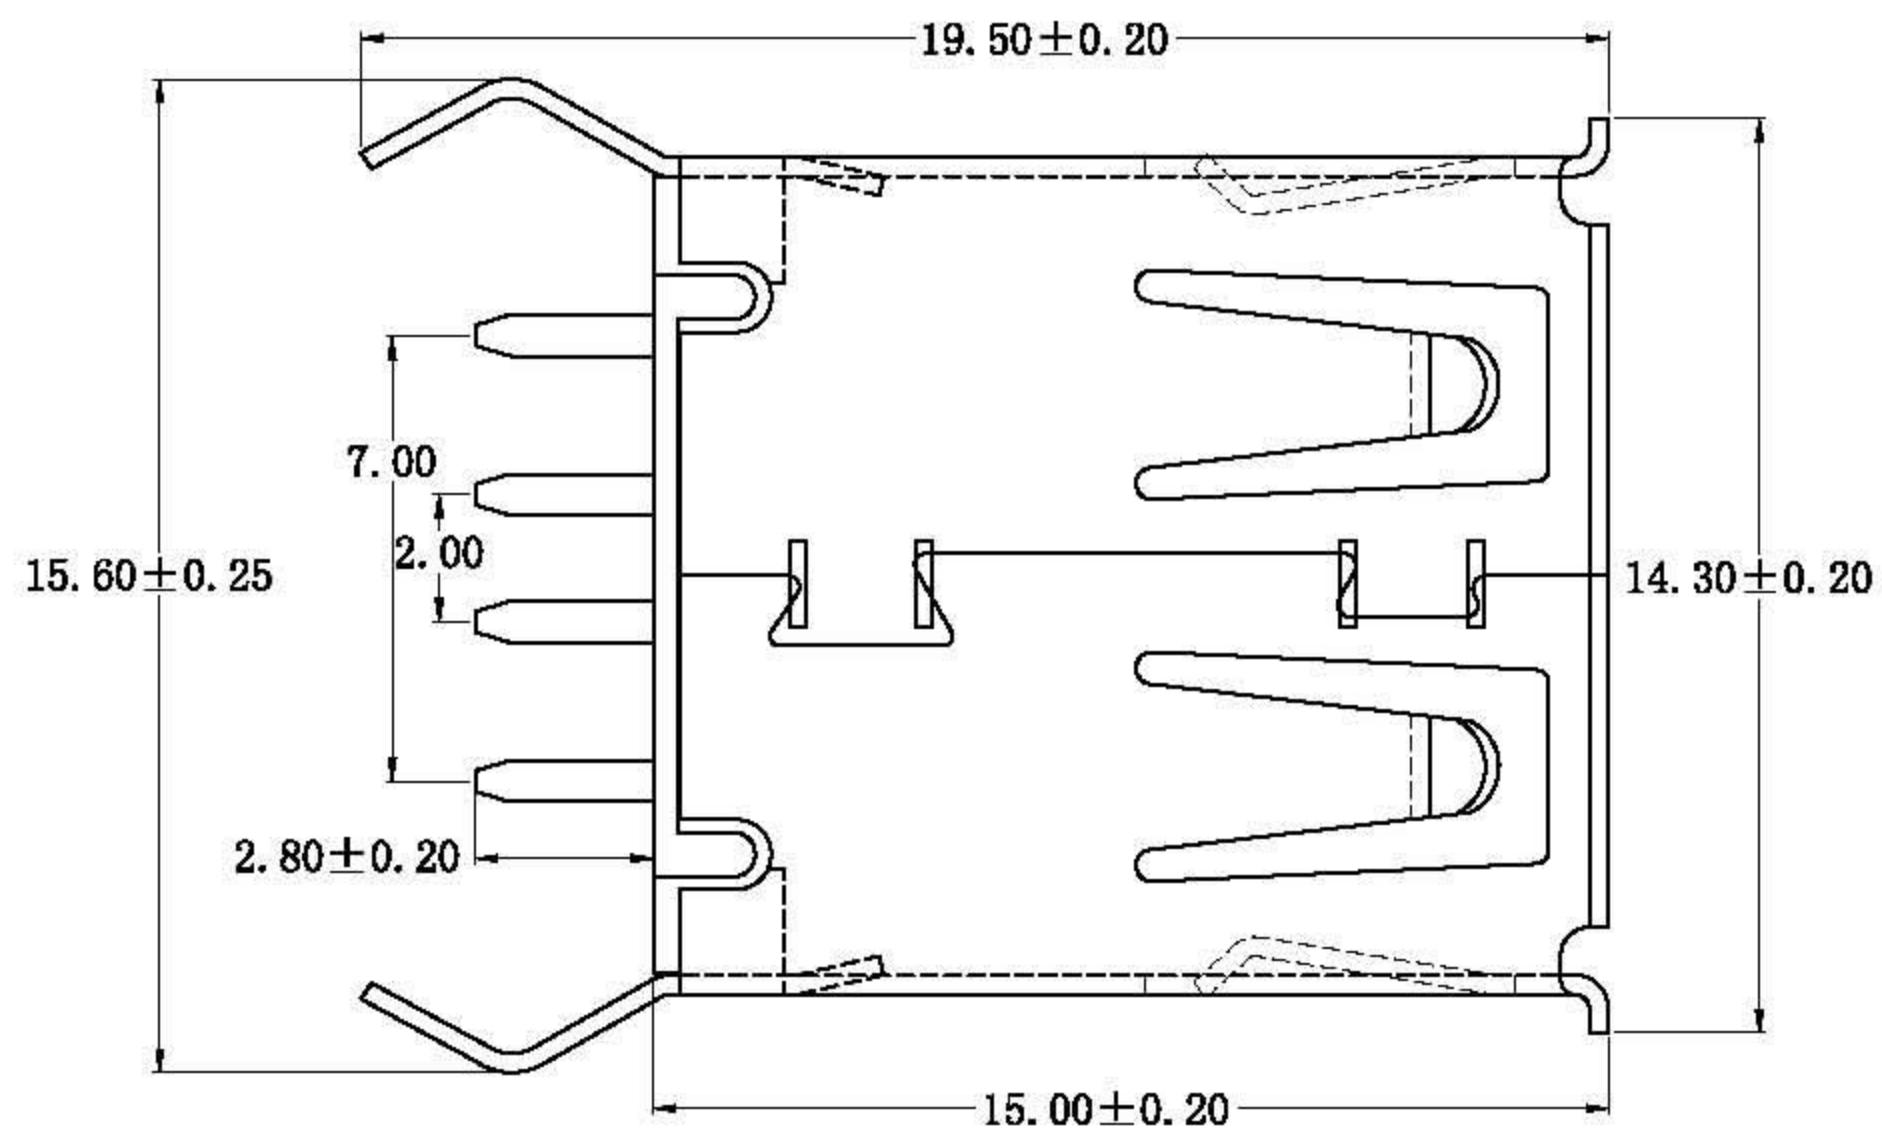

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN


原材料: Material:

1. 塑胶: Housing:
High Temperature Thermoplastics,
PBT/LCP White/Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating

D

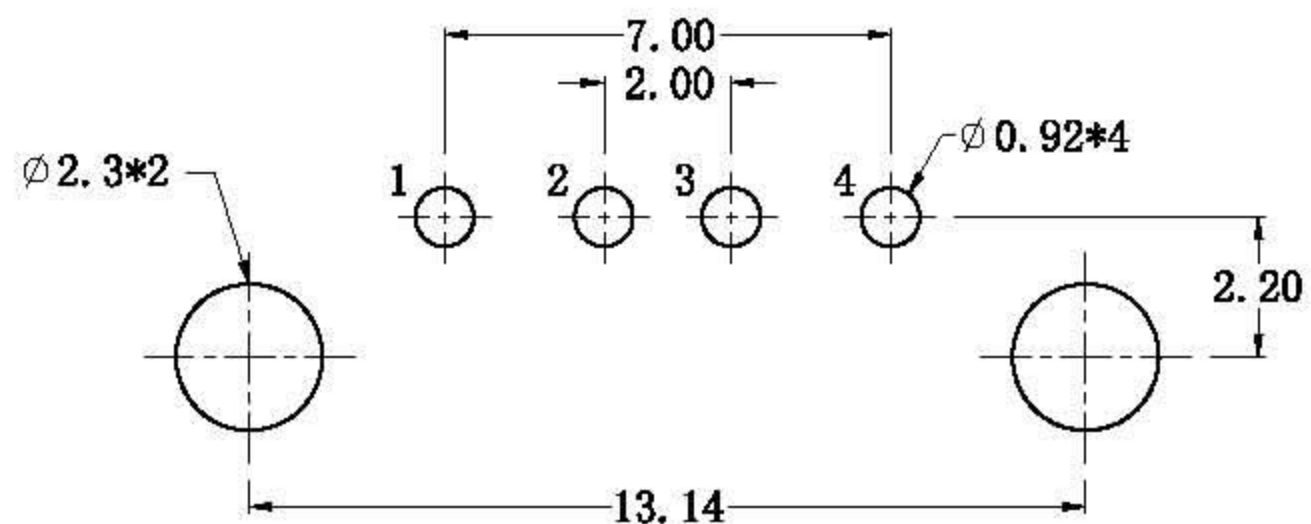

E

L&X 深圳市连欣科技有限公司

TEL: 0755-33978030 FAX: 0755-32937438

品名 (ITEM NO) USB A/F 180° DIP长体改脚(15.0)母座

料号 (PART NO) XUDF-0218-0151

模号 (MODEL NO) UB001G

图号 (DWG NO)	4C	单位 (UNIT): MM
版本 (REV)	A/1	比例 (SCALE) 1:1
日期 (DATE)	2009. 12. 17	
设计 (DESIGN)	陈钦虎	未注公差 TOLERANCE UNSPECIFIED
审核 (CHECKED)		X.X ±0.30
核准 (APPROVED)		X.XX ±0.20
		X.XXX ±0.10
		X° ±5°
		X.X° ±2°

1 2 3 4 5 6 7