



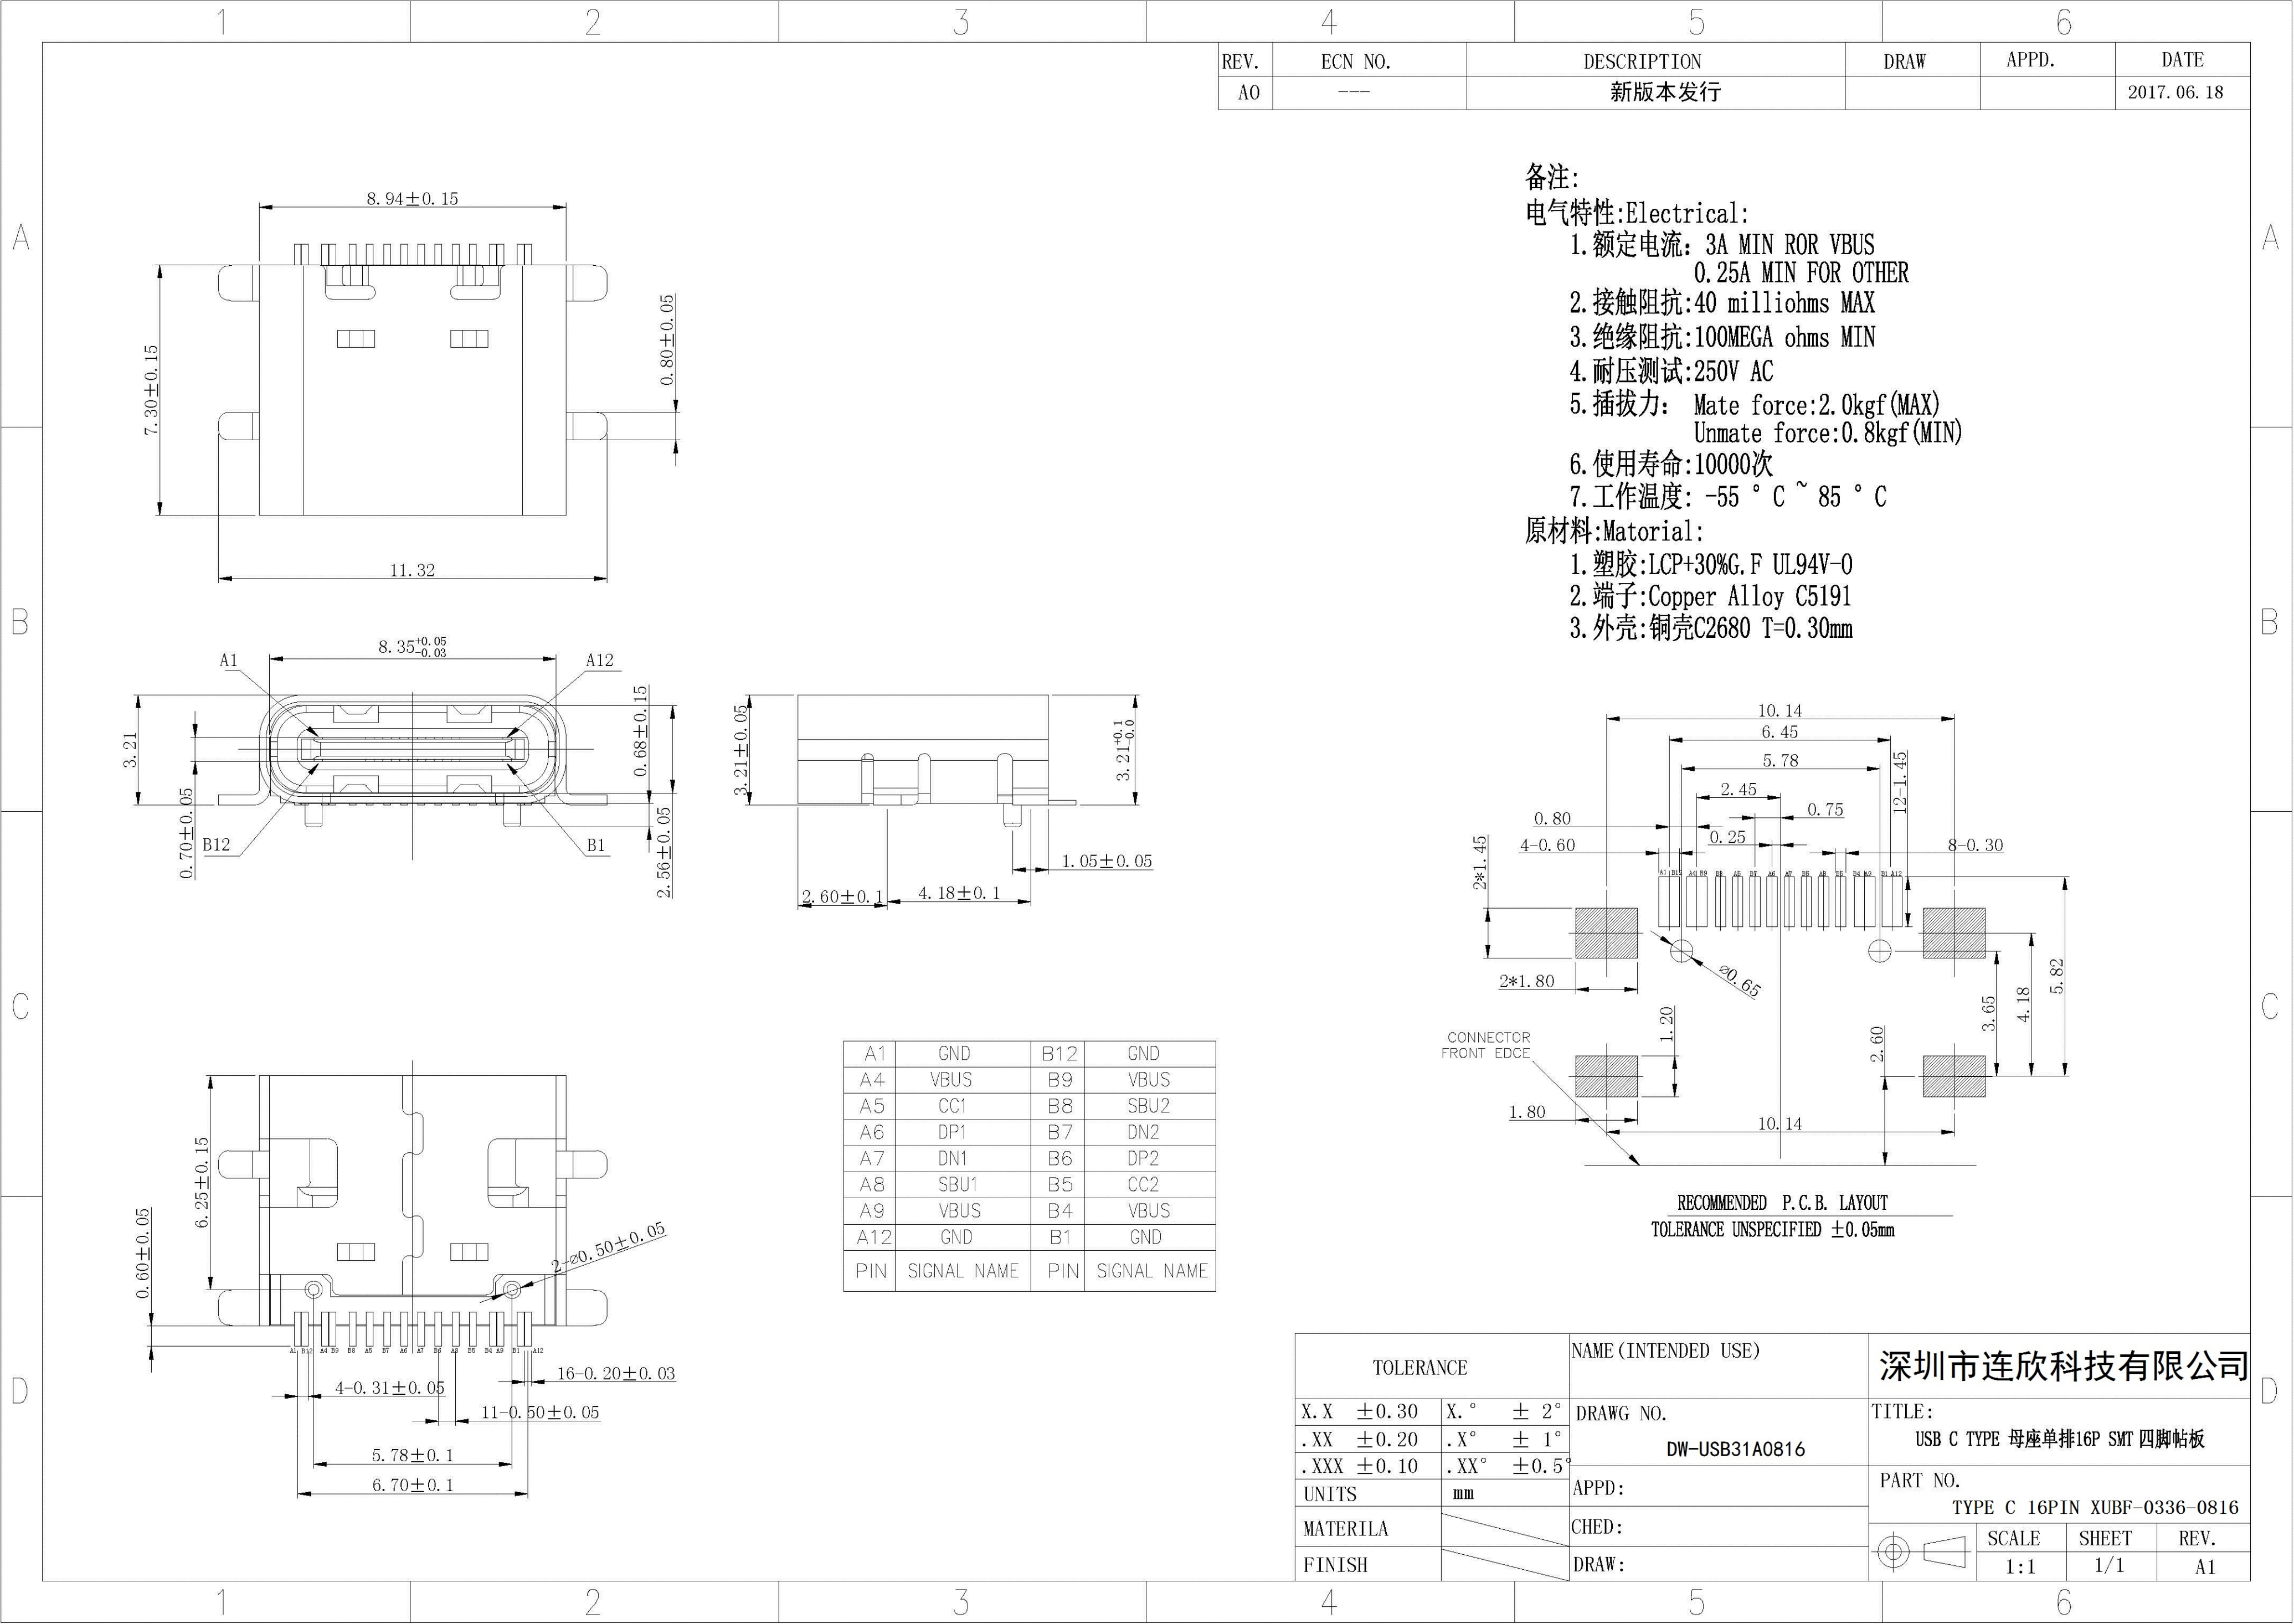

备注:
电气特性:Electrical:
1. 额定电流: 3A MIN ROR VBUS
0.25A MIN FOR OTHER
2. 接触阻抗:40 milliohms MAX
3. 绝缘阻抗:100MEGA ohms MIN
4. 耐压测试:250V AC
5. 插拔力: Mate force:2.0kgf (MAX)
Unmate force:0.8kgf (MIN)
6. 使用寿命:10000次
7. 工作温度: -55 ° C ~ 85 ° C
原材料:Matorial:
1. 塑胶:LCP+30%G. F UL94V-0
2. 端子:Copper Alloy C5191
3. 外壳:铜壳C2680 T=0.30mm

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

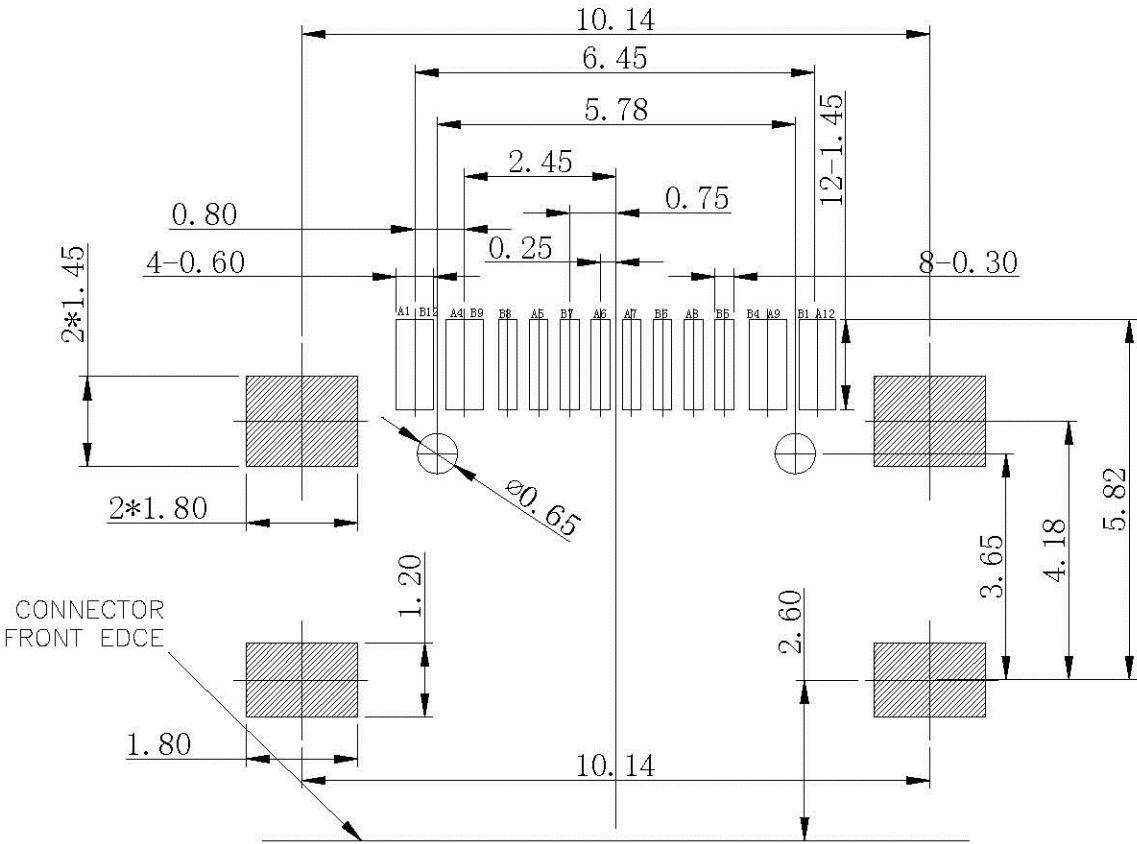

TOLERANCE		NAME (INTENDED USE)		深圳市连欣科技有限公司			
X. X ±0.30	X. ° ± 2°	DRAWG NO. DW-USB31A0816		TITLE: USB C TYPE 母座单排16P SMT 四脚帖板			
. XX ±0.20	. X° ± 1°						
. XXX ±0.10	. XX° ±0.5°						
UNITS	mm	APPD:		PART NO. TYPE C 16PIN XUBF-0336-0816			
MATERILA		CHED:					
FINISH		DRAW:			SCALE	SHEET	REV.
				1:1	1/1	A1	