
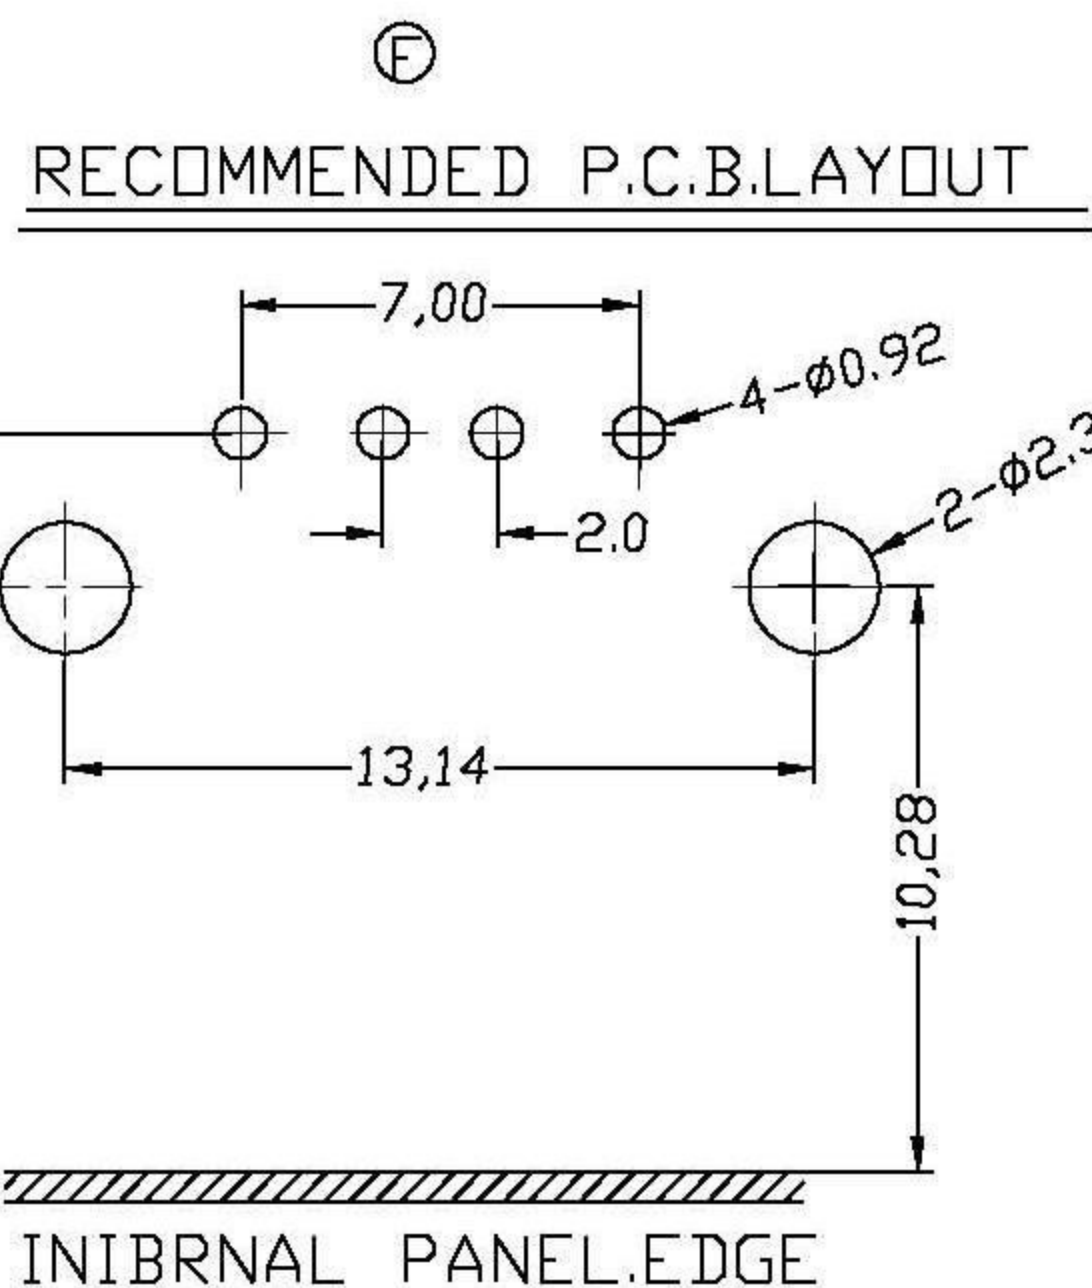
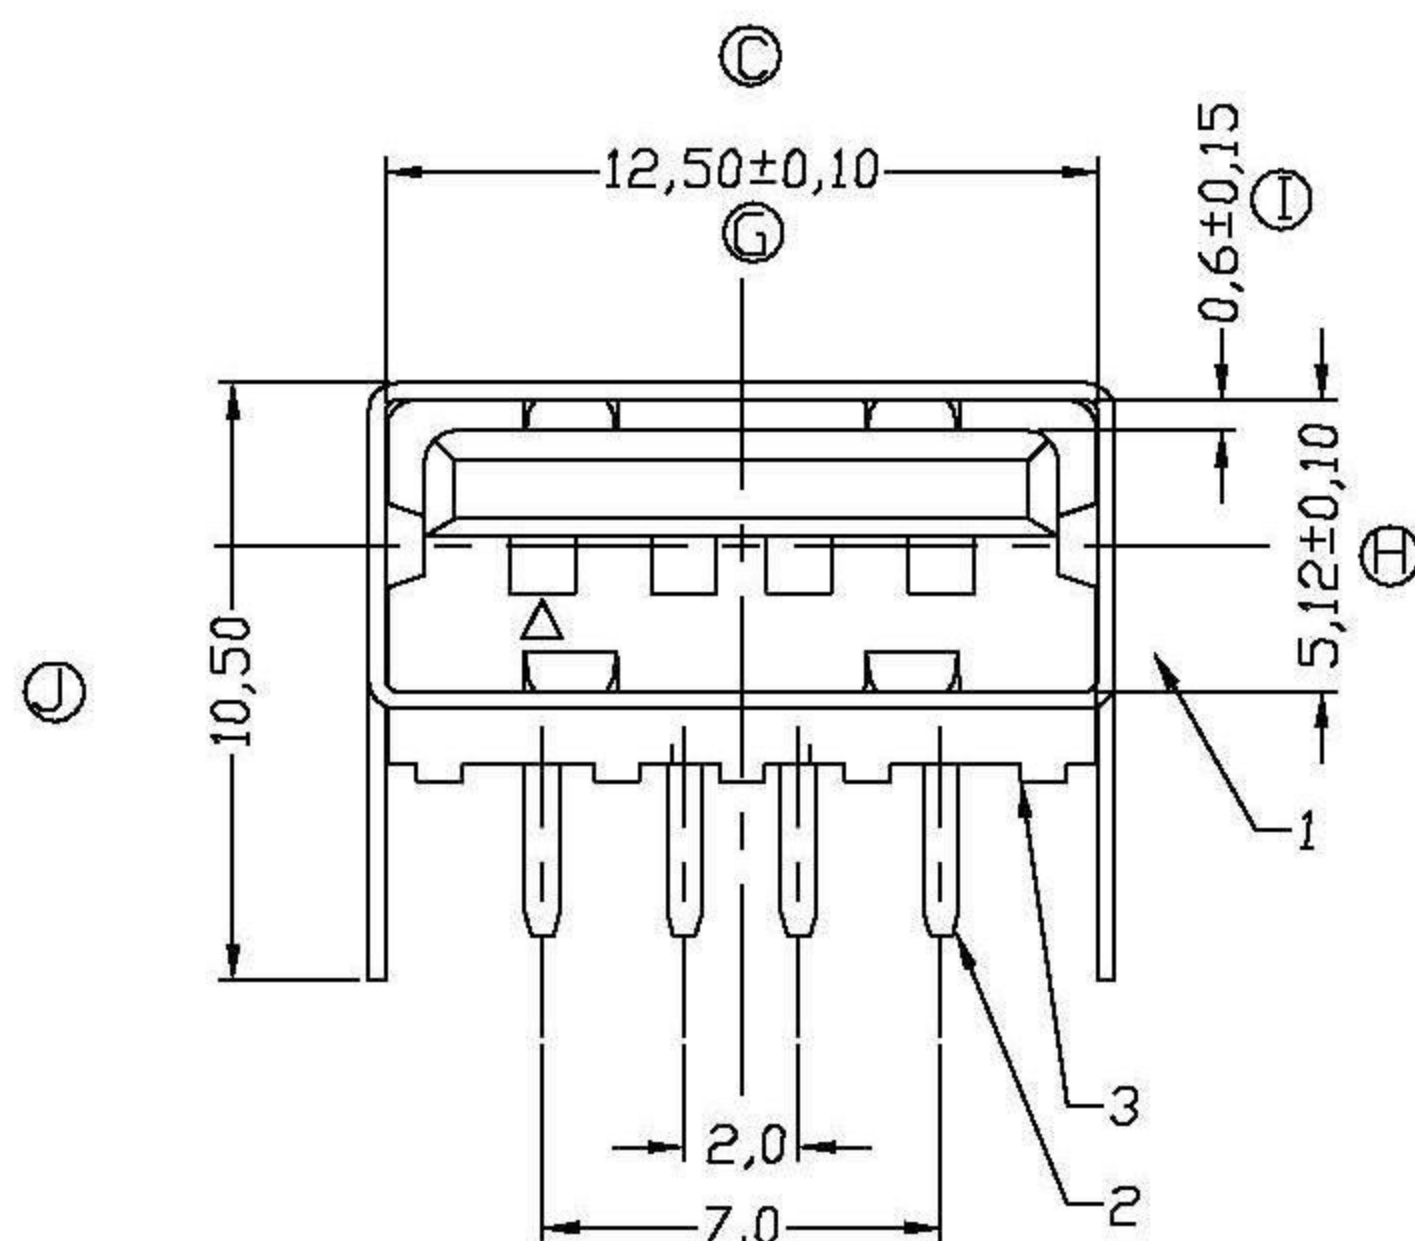
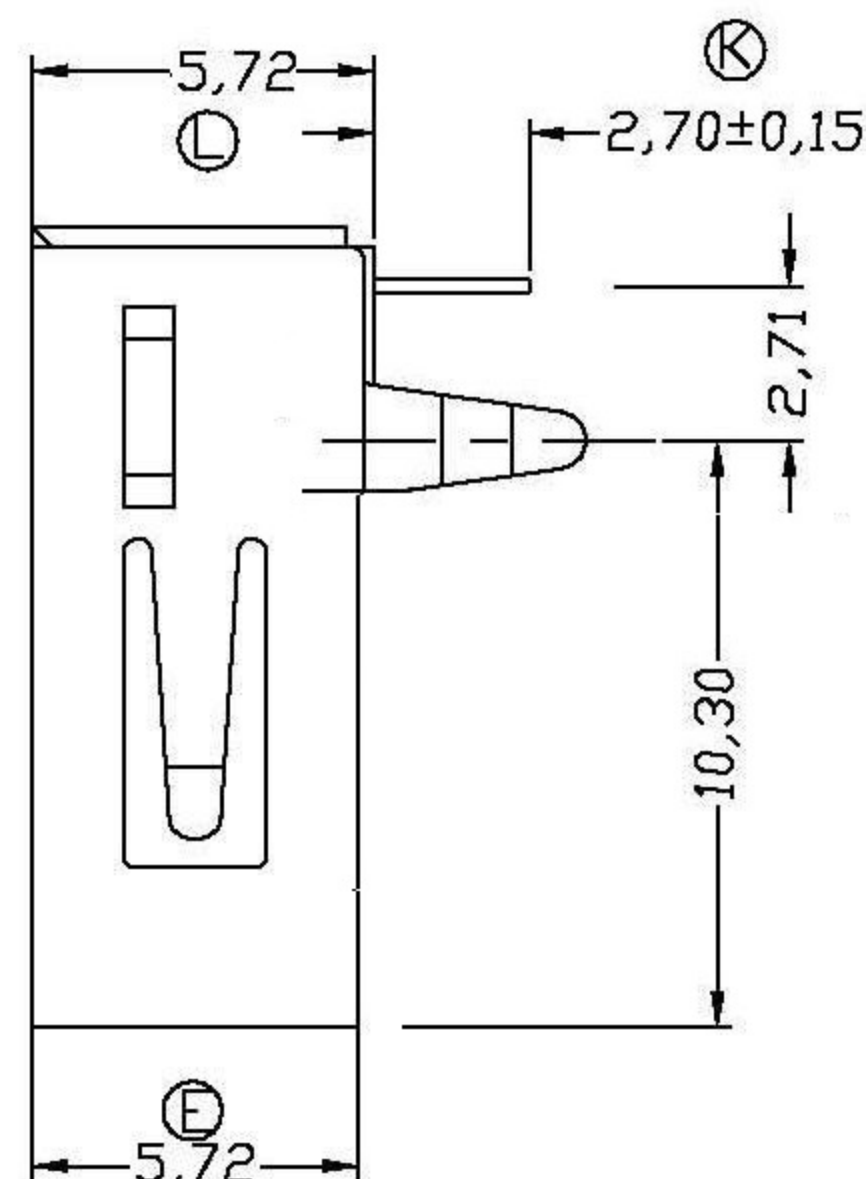


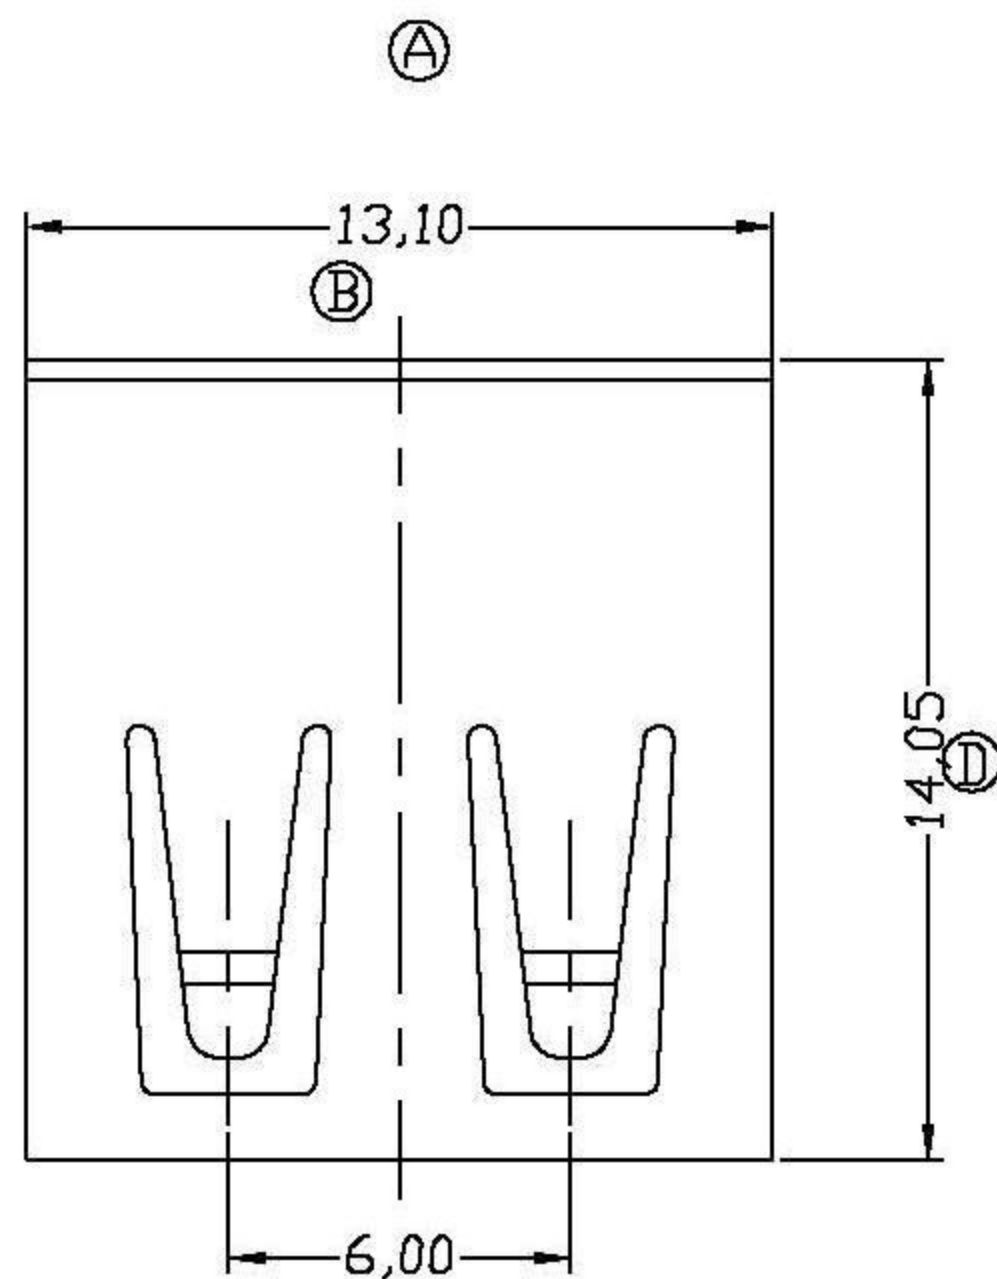

SPECIFICATIONS:

Contact current Rating:1Amperes.
DIELECTRIC Withstanding Voltage:AC 500V
at sea level
Insulation resistance:1000Megohms
Minimum.
Contact Resistance:30Miliohms Maximum
operating Temperature:-55~ ta+85~

MECHANICAL CHARACTERISTICS:

Mating Force:3.5Kg.Maximum
Unmating Force:1kg.Mlimum.

MATERIALS:

CONTACTS:Copper Alloy.
Insulator:Thermoplaste P.B.T.U.L 34V-0
Rated.
Shell:Brass t=0.30±0.02

FINISHES:

Contact:GOLD
Shell:Nickel Plated.

3	胶蕊	1		PBT 30%G		COLOR: BLACK/WHITE...
2	端子	4		C5191H	NICKEL PLATED OVER ALL 120% TIN/GOLD PLATING	GOLD/1, 3, 5, 10, 15, 30u
1	外壳	1		黄铜/Fe	NICKEL PLATING	
序号	名称	数量	料号	材料	表面	备注

L&X 深圳市连欣科技有限公司				张数 SHEET	
产品名称 PRODUCT NAME				单位 UNIT	
产品料号 PRT NO				比例 SCALE	
USB 2.0AF 90度插板直脚无卷边超薄款				图号 DWG NO	9
XDUF-0241-05B2					

1-4	2-4	3-4			一般公差 GENERAL TOL	制图 DRAWN	ZFJ
1-3	2-3	3-3			X 13 X 18-1 XX 18-2	审核 CHECKED	
1-2	2-2	3-2			X ±2.0 X ±1.0 XX ±0.5	核准 APPROVAL	
1-1	2-1	3-1				角法 PRD.	
版本 REV	变更说明 MODIFICATION	签名 SIGN	时间 DATE	审核 CHECKED	时间 DATE		