

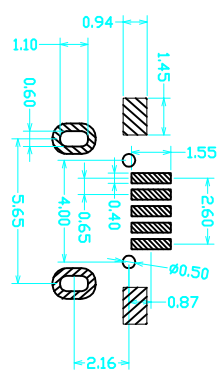

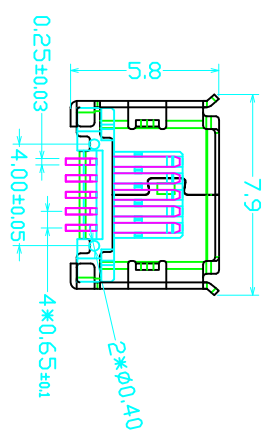



REV.	DESCRIPTION	ECN No.	NAME	DATE
A	新版发行		XIEKAIHUA	2018.06.10



RECOMMENDED P.C.B LAYOUT (TOP VIEW)  
 EFAULT TOLERANCE: ±0.05



**规格: Specifications:**

- 电气: Electrical:
  - 1. 额定: Current Rating 1.5A/contact terminal
  - 2. 额定: Voltage Rating 30V DC
  - 3. 接触: Contact Resistance 30 milliohms MAX
  - 4. 绝缘: Dielectric Withstanding Voltage: 100 V AC AT Sea Level
  - 5. 绝缘: Insulation Resistance: 100MEGA ohms MIN
- 机械: Mechanical:
  - 1. 接触: Connector Mate and Unmate Force Mate force: 3.57kgf(MAX)  
Unmate force: 1.02kgf(MIN)
  - 2. 接触: Terminal Retention 0.5kgf(MIN)

**材料: Material:**

- 1. 壳体: Housing: High Temperature Plastic, LCP White/Black
- 2. 接触: Contact: Copper Alloy C2680/c5191
- 3. 壳体: Shell: Copper Alloy C2680/SUS

- 表面处理: Finish:
  - 1. 接触: Contact: Plated Gold in Mating Area; Matte Tin On Solder Tails
  - 2. 壳体: Shell: Plated Matte tin, Salt spray test: 24 hours

**深圳市连欣科技有限公司**

<b>UNLESS OTHERWISE SPECIFIED TOLERANCES</b>		<b>TITLE:</b>		<b>MOULD NO.:</b>	
.X <sup>+</sup> ±0.15	.X <sup>-</sup> ±1.5°	MICRO USB 5PIN母座 SMT 5.90间距1.25英寸有柱 卷边		XUDF-0431-11B	
.XX <sup>+</sup> ±0.10	.XX <sup>-</sup> ±1.0°	<b>APPD.:</b> 武建峰		DWG. NO.:	
.XXX <sup>+</sup> ±0.05	.XXX <sup>-</sup> ±0.5°	<b>CHKD.:</b>		USB-A043-1C-1B	
<b>MAT'L.:</b>		<b>DR.:</b>		<b>UNIT:</b>	
<b>SEE NOTES</b>				mm	
				<b>SCALE:</b>	
				1:1	
				<b>REV.:</b>	
				A	