


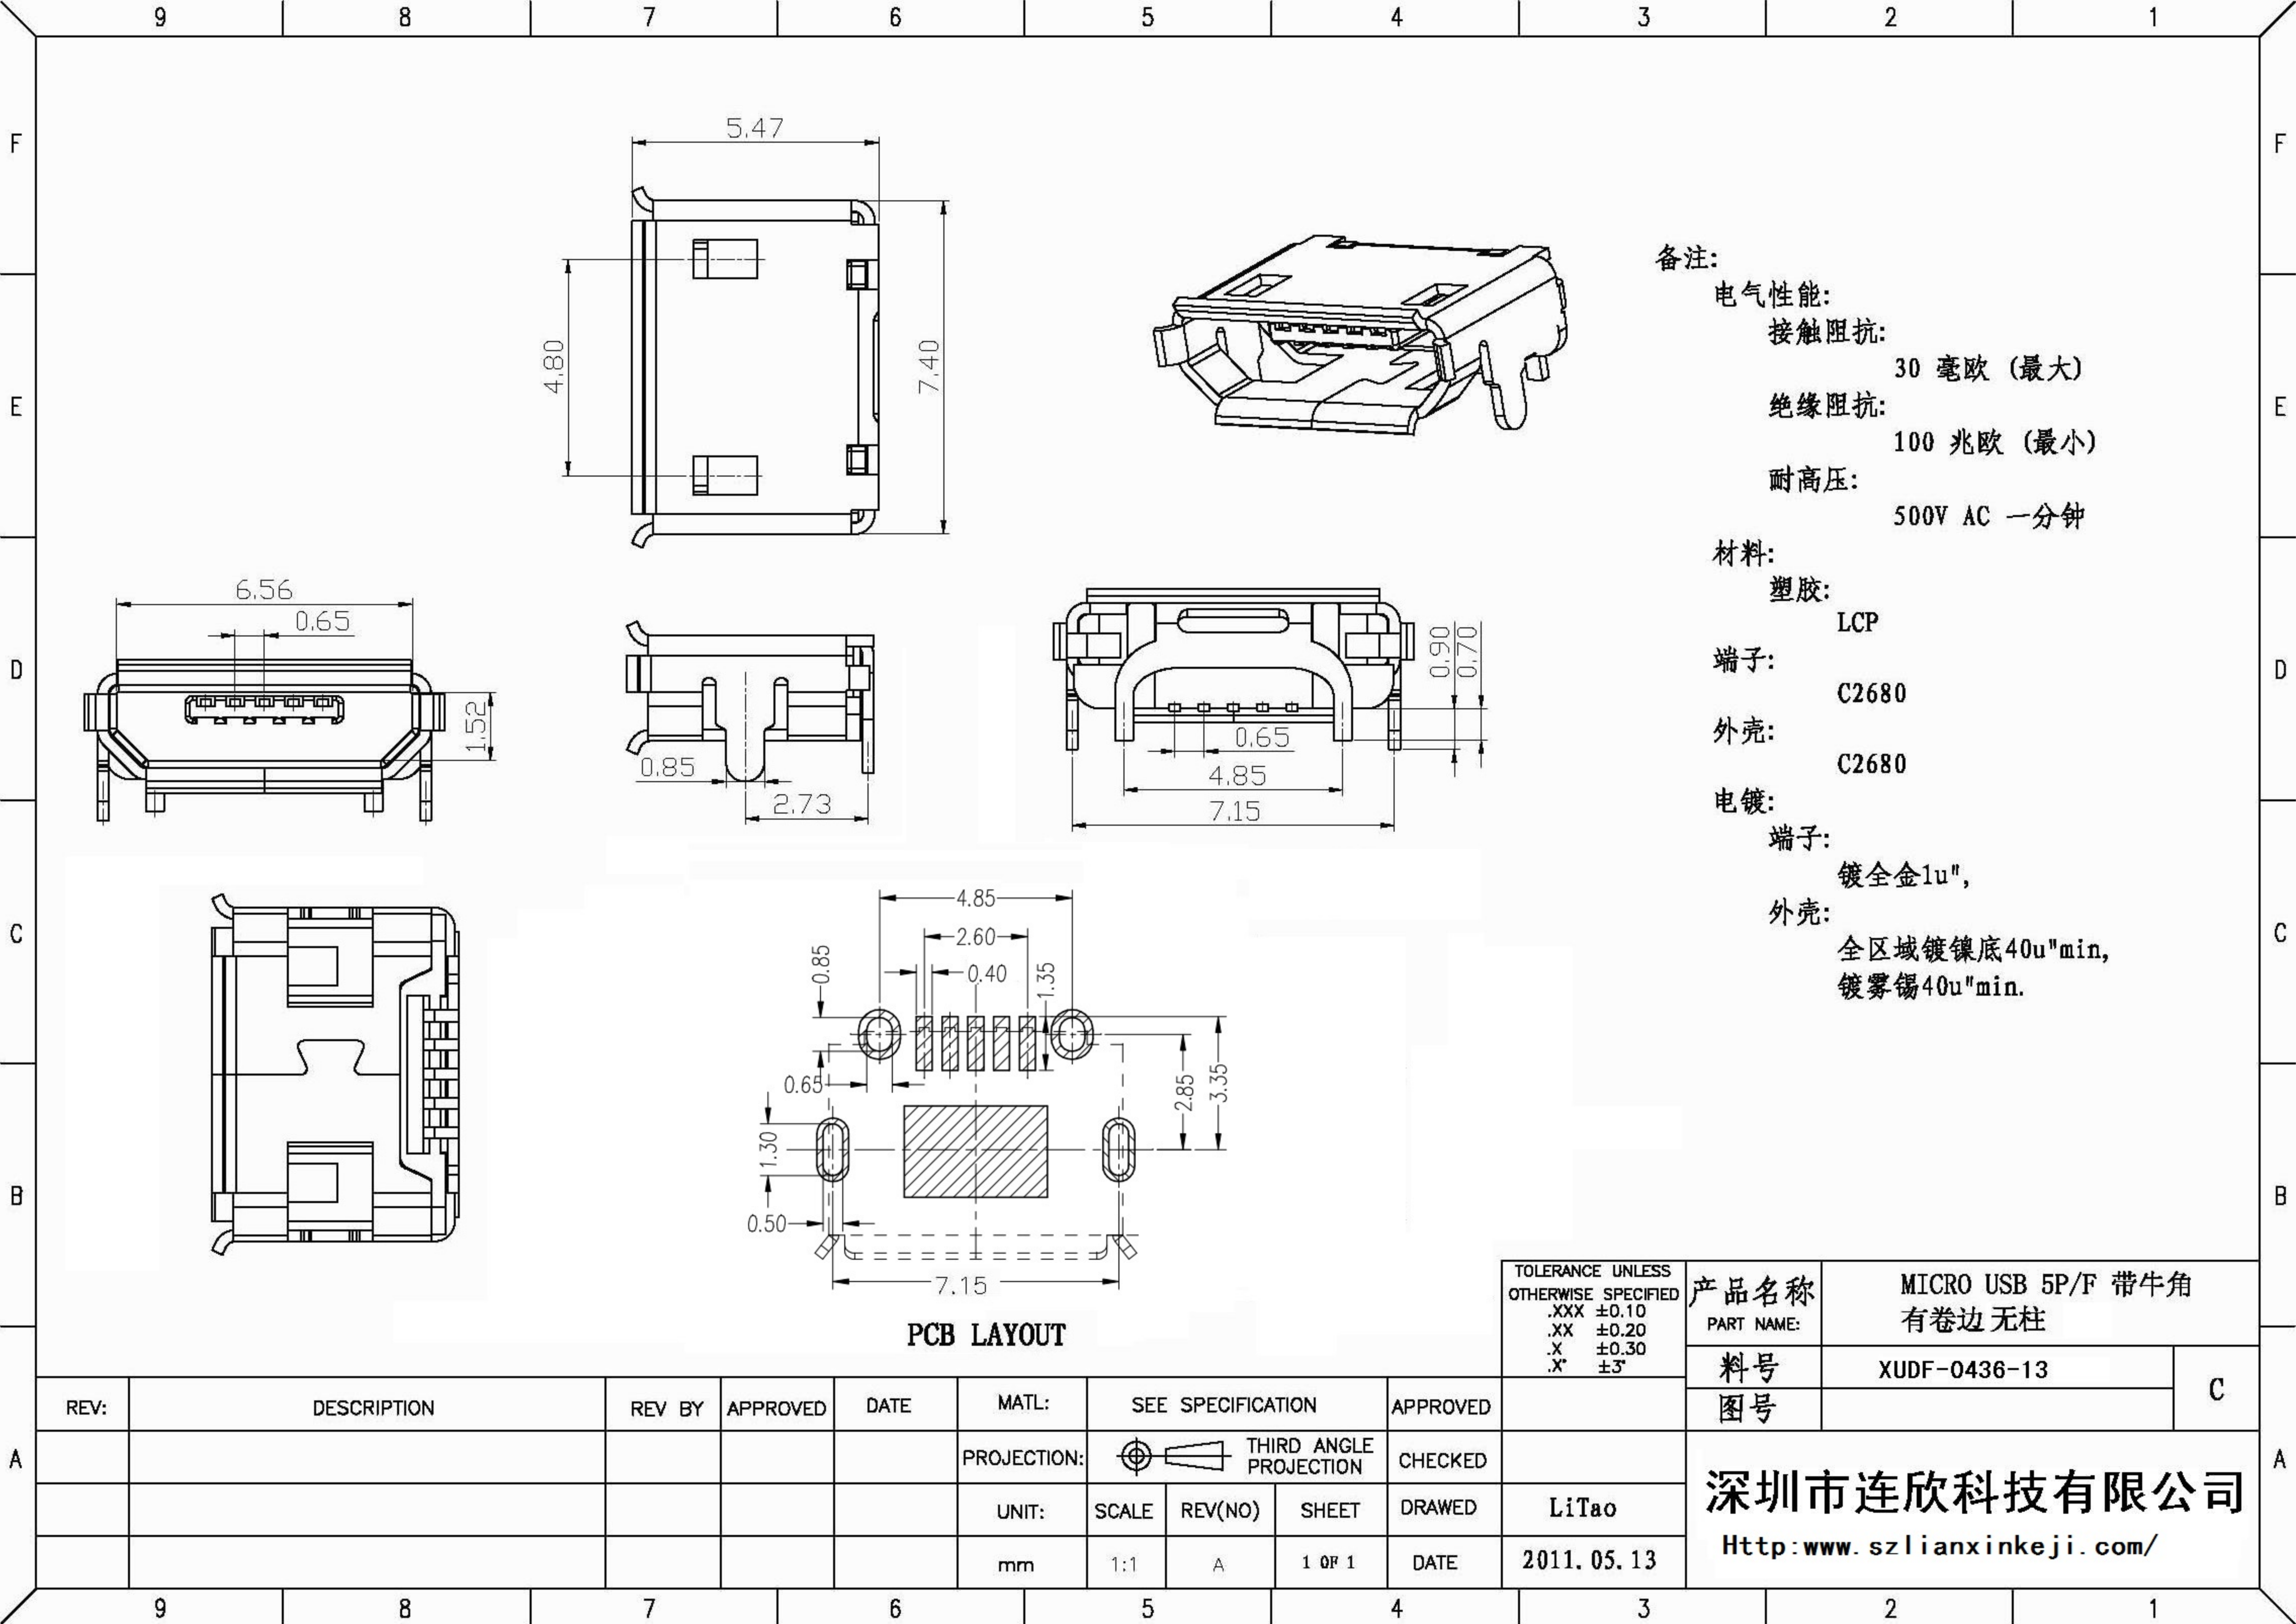

备注:
电气性能:
接触阻抗: 30 毫欧 (最大)
绝缘阻抗: 100 兆欧 (最小)
耐高压: 500V AC 一分钟
材料:
塑胶: LCP
端子: C2680
外壳: C2680
电镀:
端子: 镀全金1u",
外壳: 全区域镀镍底40u"min,
镀雾锡40u"min.

PCB LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX	±0.10
.XX	±0.20
.X	±0.30
.X'	±3°

产品名称 PART NAME:	MICRO USB 5P/F 带牛角 有卷边无柱	
	料号	XUDF-0436-13
	图号	C

REV:	DESCRIPTION	REV BY	APPROVED	DATE	MATL:	SEE SPECIFICATION			APPROVED
					PROJECTION:	THIRD ANGLE PROJECTION			CHECKED
					UNIT:	SCALE	REV(NO)	SHEET	DRAWED
					mm	1:1	A	1 OF 1	DATE

LiTao	深圳市连欣科技有限公司 Http:www.szlianxinkeji.com/	
2011. 05. 13		