由 Autodesk 教育版产品制作

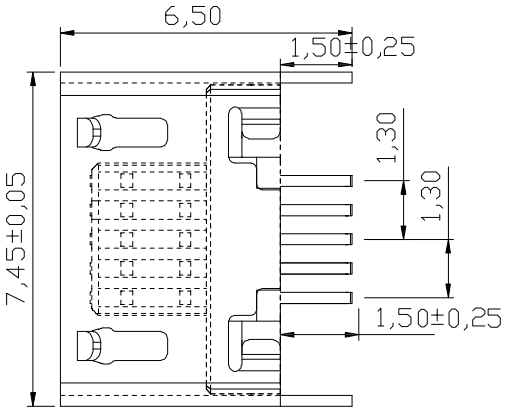

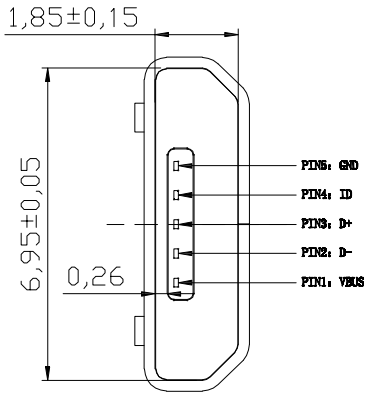

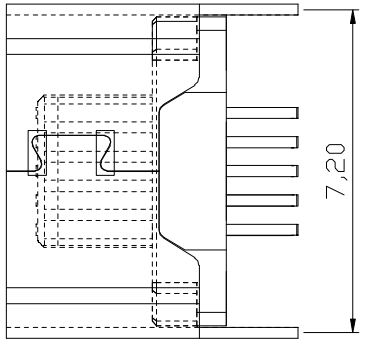



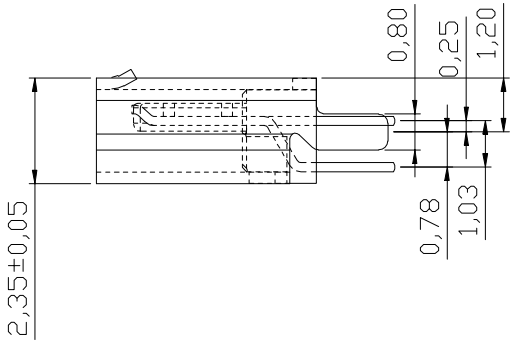

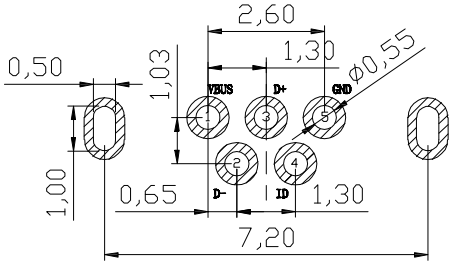

PCB 仅供参考

Note:
1. Material:
   1.1 Housing: High temperature thermoplastic with g.f, UL94v-0
   1.2 Contact: copper alloy, t=0.20mm
   1.3 Shell: copper alloy, t=0.25mm
2. Specification:
   2.1 Current rating: 1 A Max
   2.2 Dielectric withstanding voltage: 100V(ac) for 1 Min
   2.3 Contact resistance: 50MW Max
   2.4 Insulation resistance: 100MW Min
   2.5 Total mating force: 3.57kgf Max
   2.6 Total unmating force: 1.0kgf Min. 0.81～2.05 kgf Min
   2.7 Temperature range: -30℃～80℃

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	MM
.X	±0.08
.XX	±0.05
.XXX	±0.03
ANGULAR ±2°	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

SCALE: 1:1	NUMBER:
MATERAIL:	HRC:
DRAWN BY ERIC	DATE 08.03.27
CHECKED BY	DATE 2016.09.01
APPROVED BY	DATE

深圳市连欣科技有限公司

NAME: Mirco 5P 180° 平口

THIRD ANGLE PROJECTION | REVISE ON CAD ONLY

PART NO.	DWG NO.	SHEET NO.
XUDF-0418-016	JYT-040	1/1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETAPY TO CYBERAPEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由 Autodesk 教育版产品制作