

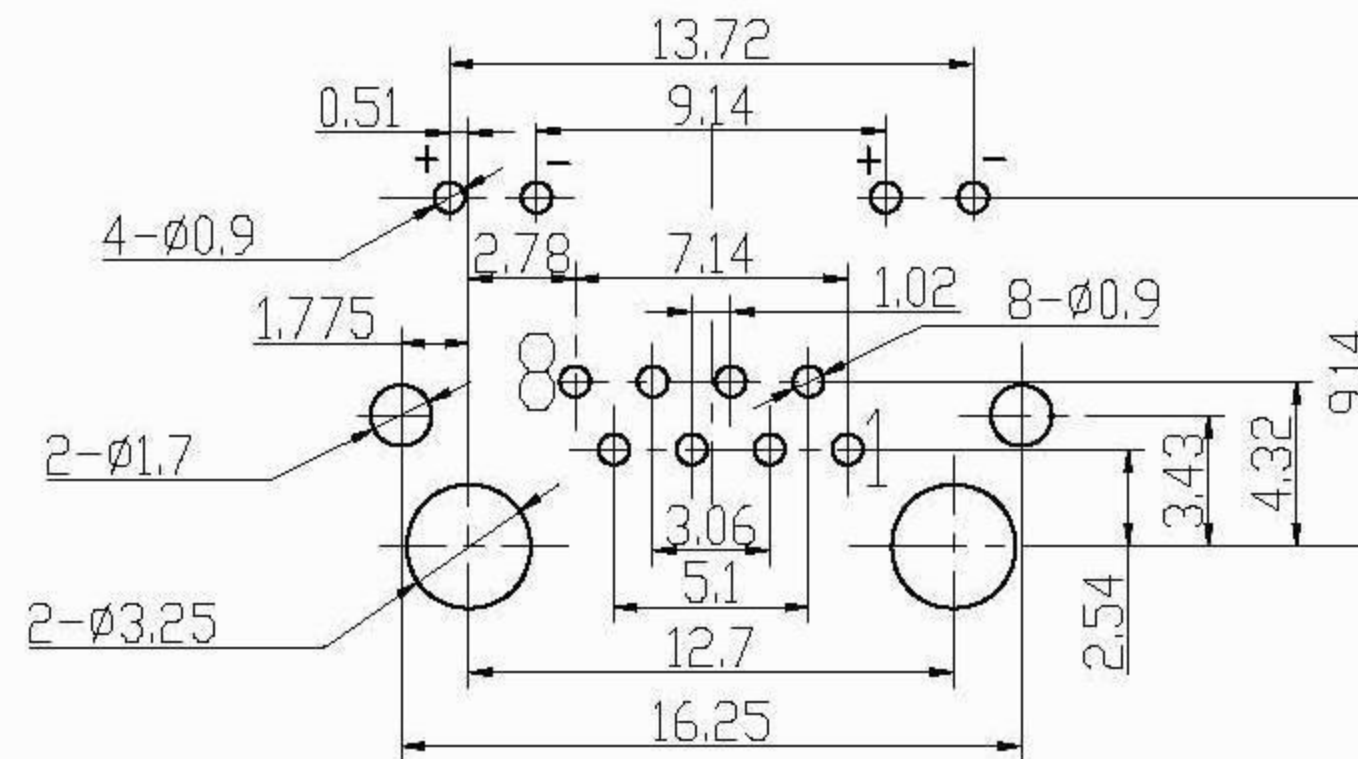
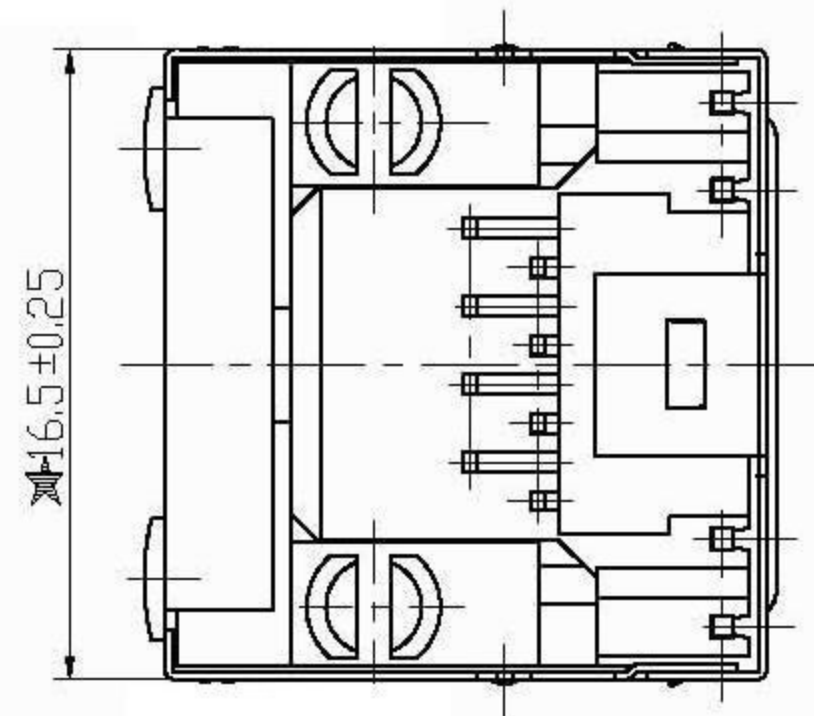



REV.	ECN NO.	DATE

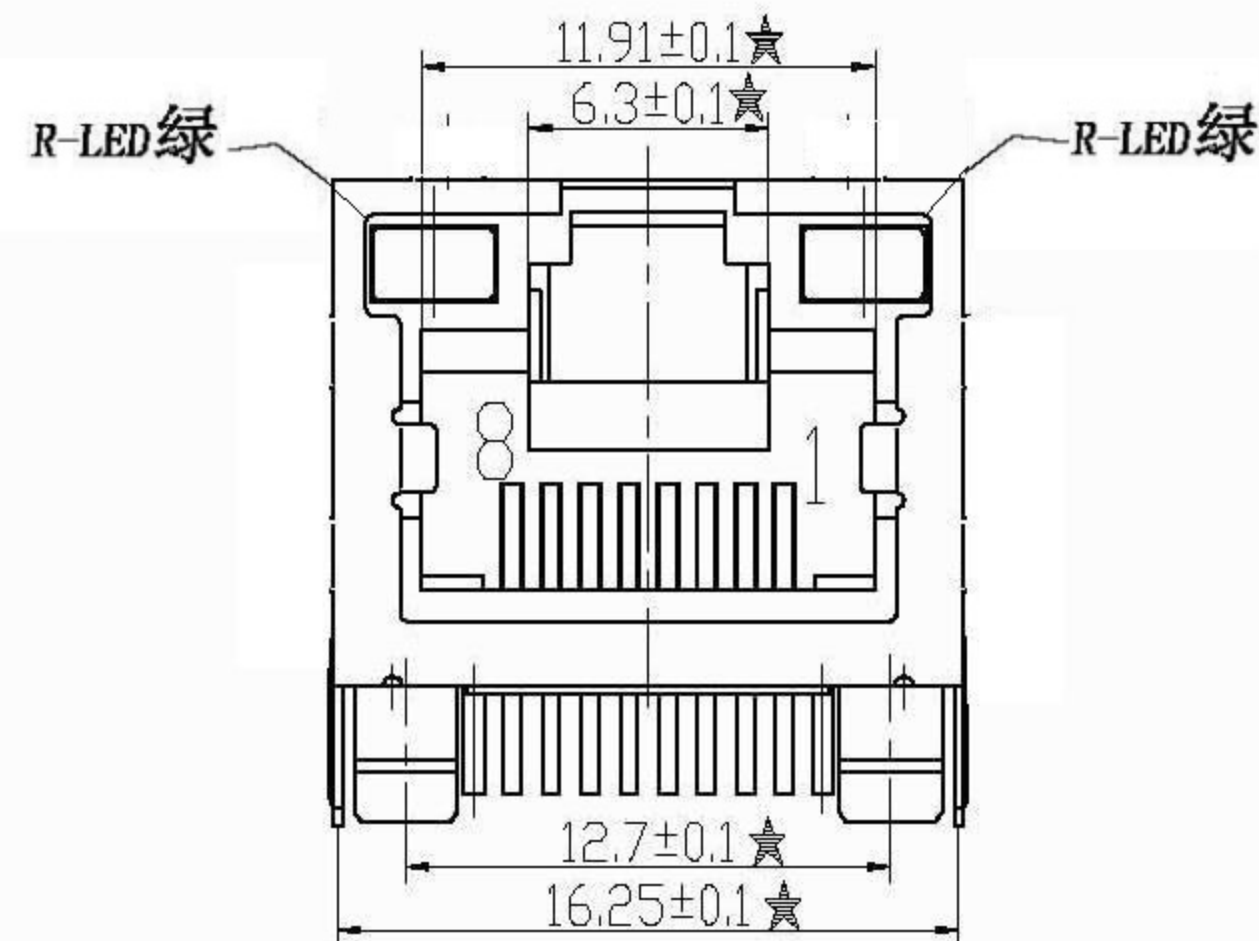

PCB LAYOUT

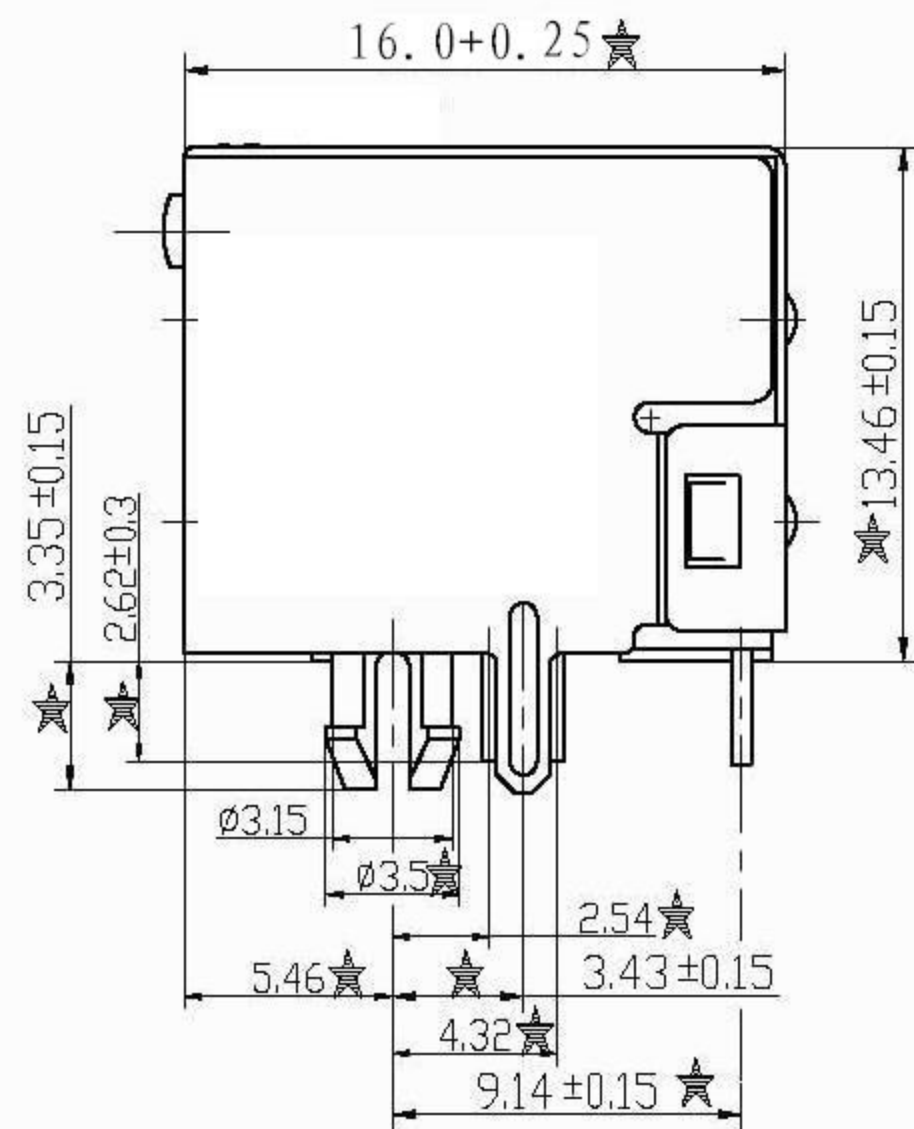

- NOTE:
- ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 20 MILLIOHMS Max;
 - INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
 - DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;
 - MECHANICAL:
 - HOUSING: PBT, UL94V-0, BLACK;
 - INSERT PBT, UL94V-0, BLACK;
 - BACK COVER PBT, UL94V-0, BLACK;
 - TERMINALS: T0.36xW0.46 PHOSPHOR BRONZE PLATED 3u" Au;
 - LED COLOR YELLOW GREEN;
 - SHIELD:H65Y;
 - DURABILITY: 750 CYCLES Min.
 - ★Critical dimension.

TOLERANCES 0~15±0.15, 15~30±0.2, 30~±0.25 ANGLE±1°.	MATERIAL: SEE NOTE	 FIRST ANGLE PROJECTION	 A4 SIZE	L&X 深圳市连欣科技有限公司	
	FINISH: SEE NOTE			NAME	RJ 45 90插板式 8P8P 16长带双LED绿灯
	SHEET 1 OF 1	SCALE	UNIT	DWG NO:	XDRJ-5806-017
		2.5:1	mm		