
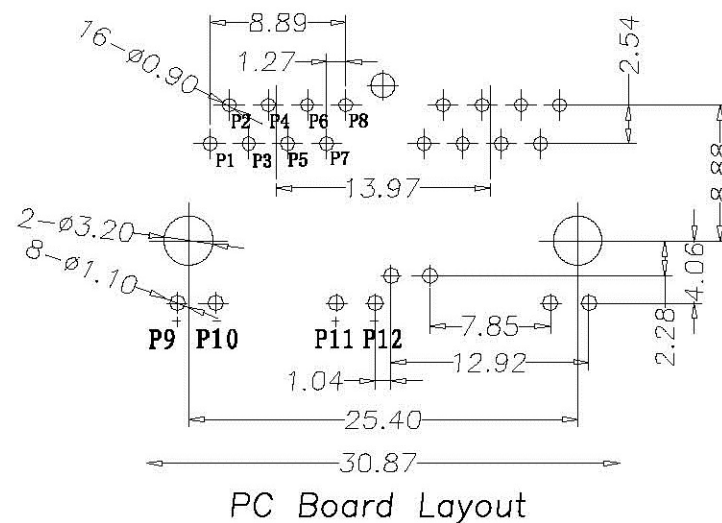
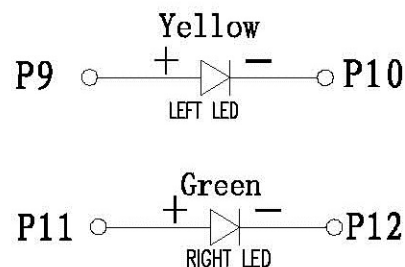
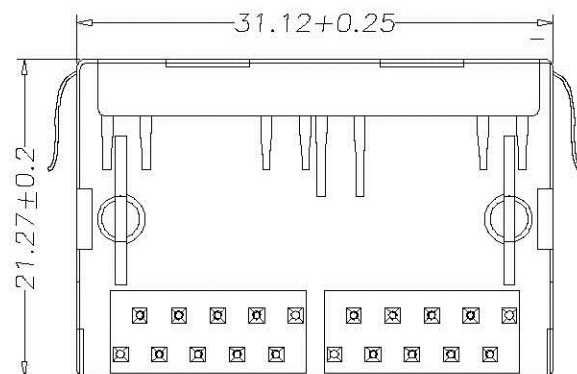


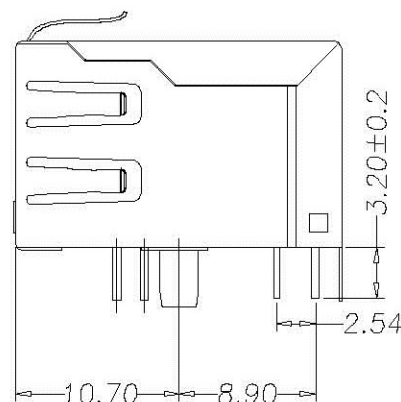

LED Specification

Standard LED Color	LED Wavelength	Forward (V MAX)	Typical (V TYP)	Luminous Intensity
Green	560–580 nm	2.5V	2.1–2.2V	9–25 MCD
Yellow	580–610 nm	2.5V	2.1–2.2V	9–30 MCD

1. LED intensity/wavelength measured with Photo Research PR-650 Colormeter
2. With a forward current of 20 mA, Absolute Maximum Ratings (Ta=25°C)

深圳市连欣科技有限公司

TEL: 0755-33978030 FAX: 0755-32937438

Scale:None Draw : Kal

Units: mm Approved: Ansom

Unless otherwise stated
otherwise tolerances as follows:

1. XXX ± 0.10 . XX ± 0.25 . X ± 0.35
ANG $\pm 3^\circ$

name:

8P8C 1X2 PCB JACK

5 Part number:

XDR.J-5903-0236

Rev: A

Date: 2010/05/08

3 new: 

Page: 1/1

File Name:

E: 工程图

NOTES:

ELECTRICAL:

- | | |
|--------------------------|------------------------------------|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMP. |
| 3. CONTACT RESISTANCE | : 30 MILLIOHMS MAX |
| 4. INSULATION RESISTANCE | : 500 MEGOHMS MIN @ 500 NDC. |
| 5. DIELECTRIC STRENGTH | : 1000 VAC RMS 50Hz or 60Hz, 1MIN. |

MECHANICAL:

1. HOUSING & INSERT MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. SHIELD : 0.20~0.25MM THICKNESS BRASS WITH NI PLATED.
4. MATING/UNMATING FORCE : 2.2KG.F MAX.
5. RETENTION STRENGTH : 7.7KG.F MIN BETWEEN JACK AND PLUG.
6. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -45°C ~+80°C REATIVE HUMIDITY<70%
2. OPERATION : -45°C ~+80°C

