


**RoHS**

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0		N/A	New Design	2016.11.8	李鹏程

**1.Mechanical:**

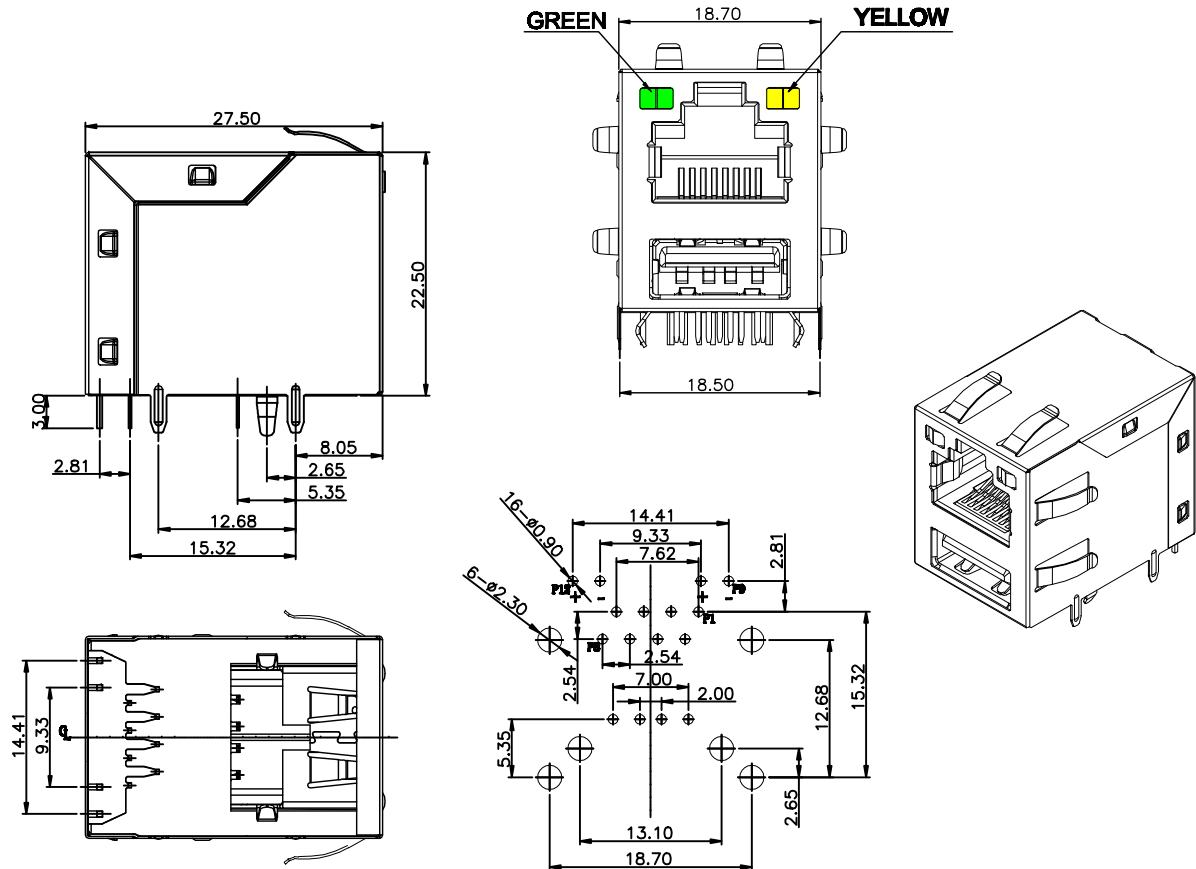


RECOMMENDED P.C.B LAYOUT  
TOP VIEW (COMPONENT SIDE)

**2.Notes:**

- 1.Meets for exceeds IEEE802.3 standards
- 2.Materials:
  - 2.1.Housing: Thermo plastics,PBT ,BK,UL94V-0
  - 2.2.Insert Base : Thermo plastics.PBT.BK.UL94V-0
  - 2.3.Contact: Phosphor Copper
  - 2.4.Shell: Alloy
  - 2.5. Contact: Tin Plating 100u" on solder tail area,
  - 2.6.RJ45 Gold plating Flash u" on contact area.
  - 2.7.USB Gold plating Flash u" on contact area,
  - 2.8.30u" min Ni underplating over all.

**3.LED Information:**

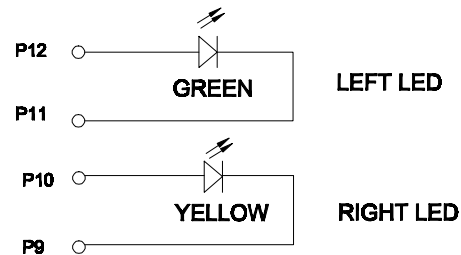

 UNIT: mm [Inch]  TOLERANCE: Unless Otherwise Specification All Tolerance Are : $\pm$ 0.25mm  SCALE:1:1 SIZE:A4	<b>深圳市连欣科技有限公司</b>	
	DESIGN: Jerry Li	PART NAME: RJ45 WITH SINGLE USB 2.0 WITH LED,WITH EMI FINGER
	CHECKED: Jerry Li	PART NO. XDRJ-5806-0670
	APPROVED: J Mou	DRAW NO. SLC-670-A
		SHEET NO. 1 OF 1