
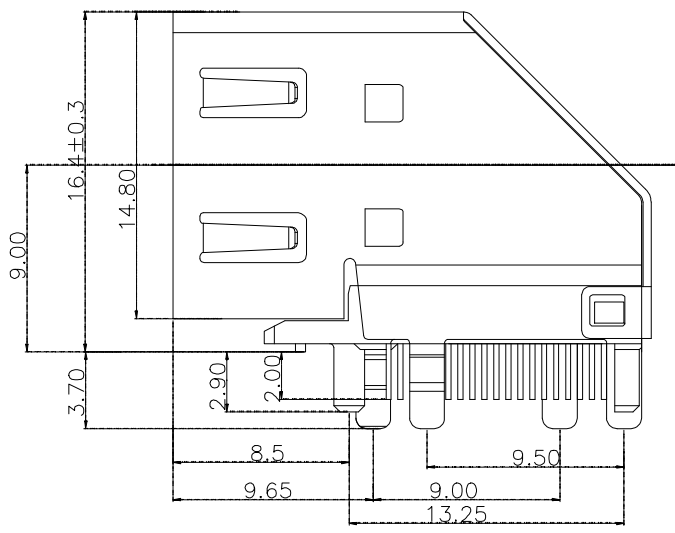
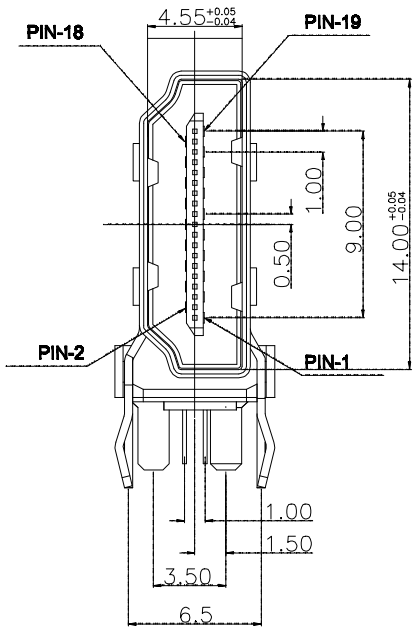
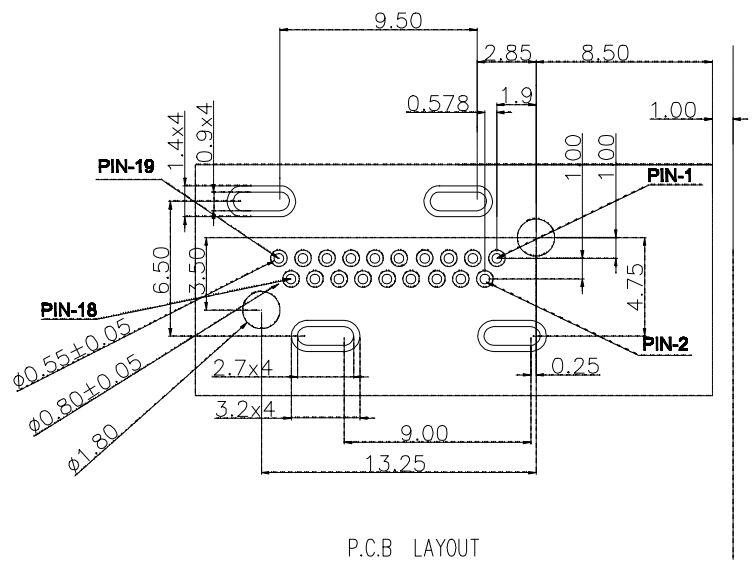


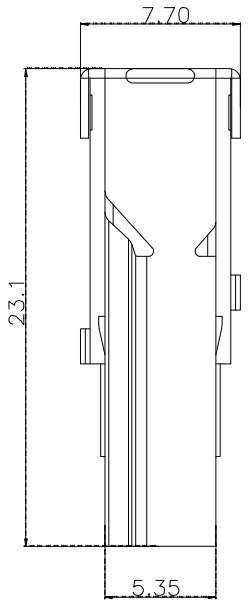

- 规格:
1. 插入力: 44.1N MAX.
 2. 拔出力: 9.8~25N
 3. 耐久性: 10000 CYCLES MIN.
 4. 额定电流: 0.5A
 5. 额定电压: 40V MAX
 6. 耐电压: 500V AC MIN. (UNMATED)
300V AC MIN. (MATED)
 7. 接触阻抗: 30mΩ MAX.
 8. 绝缘电阻: 100MΩ MIN (UNMATED)
10MΩ MIN (MATED)
 9. 工作温度: -20°C TO +85°C
 10. 所用材质须符合RoHS要求

L&X 深圳市连欣科技有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: HDMI A TYPE 侧插	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. XDHF-1901-0811	
	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: LX-HDMI16080811	
	SCALE: 1:1	SIZE: A4	SHEET NO. 1 OF 1	