

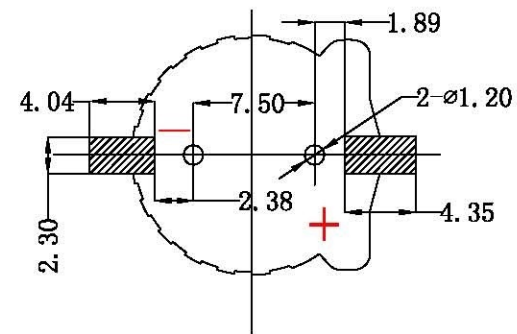
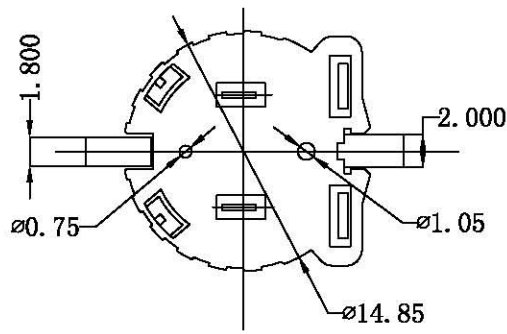


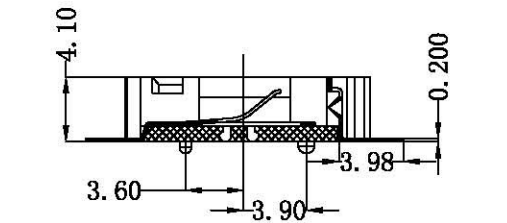

7		8	
REV.	ECN NO.	REVISED	DATE

NOTE:
1.MATERIAL:
a.HOUSING:THERMOPLASTIC GLASS FIBRE UL94V-0
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING:A*u")
SEE ORDERING INFORMATION
2.ELECTRIC:
a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 750V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C

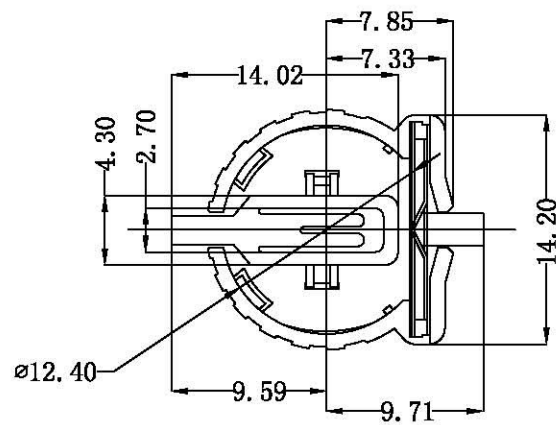

PCB Layout Diagram
Top View

工程部
2010.11.4
ZhouRuiCai

3	TERMINAL (-)	1	PHOSPHOR BRONZE, T=0.20MM	Gold Plating and Ni Under-Plating
2	TERMINAL (+)	1	PHOSPHOR BRONZE, T=0.20MM	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPS	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		深圳市连欣科技有限公司			
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10		ANGLES: X :±1° X.X :±0.5°		SCALE: 1:1	
SIZE: A4		VIEW: ②		PART NO:	
UNIT: mm		REV.: A/0		XDCR-1220-006	
DSND		YangFeng		DATE	
CHKD		ZhouRuicai		DATE	
APVD		XueZhengy		DATE	
WEIGHT: 0.6 g		2010.11.3		TITLE:	
SHEET 1 OF 1		2010.11.3		BS-1220-2SMT	