

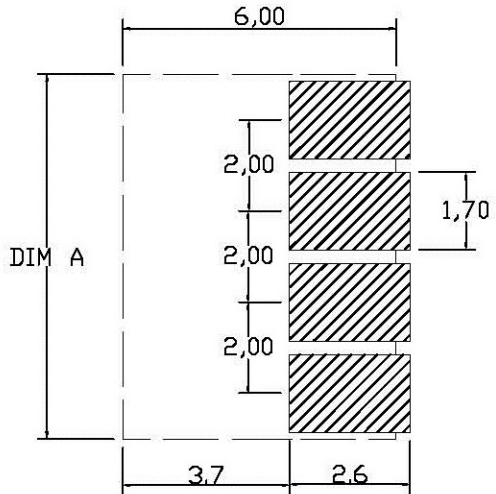
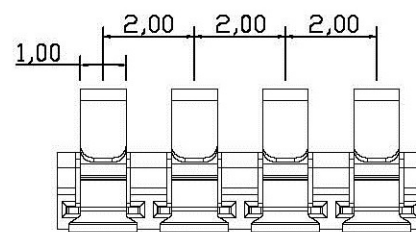
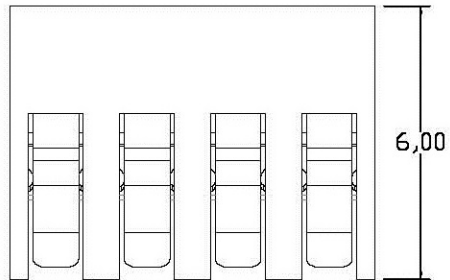


由Autodesk教育版产品制作

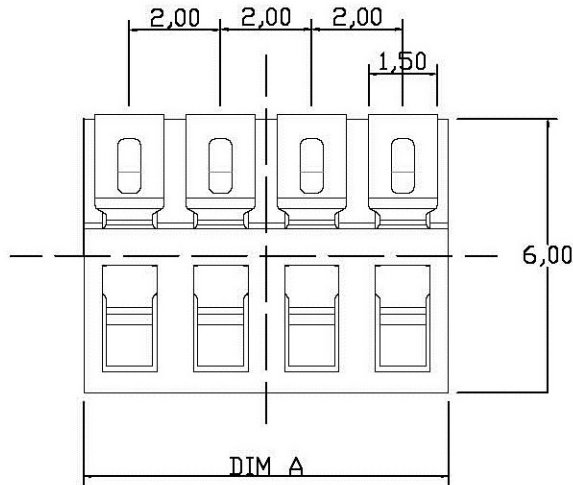


RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

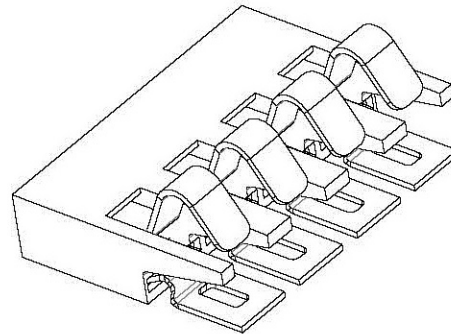

性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 触点镀金3U",
- 使用寿命: 5000次以上

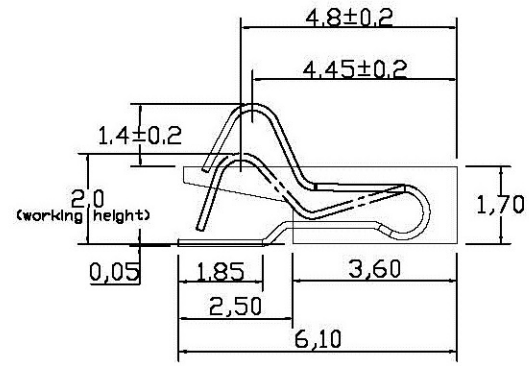

Pin数	PART NO.	DIM A
2Pin	BC-12-2P170-3U	4.0
3Pin	BC-12-3P170-3U	6.0
4Pin	BC-12-4P170-3U	8.0
5Pin	BC-12-5P170-3U	10.0
6Pin	BC-12-6P170-3U	12.0
7Pin	BC-12-7P170-3U	14.0
8Pin	BC-12-8P170-3U	16.0

版本REV. 更改版标记REVISIONNOTE 日期DATE		未注公差 TOLERANCE		深圳市连欣科技有限公司	
		X. ±0.35 X.* ±4*			
		X.X ±0.25 X.X* ±3*		品名ARTICLE: 电池连接座	
绘制DRAWN 叶智谋		X.XX ±0.15 X.XX ±2*			
设计DES'D 李明华		X.XXX ±0.05 X.XXX ±1*		图号MODEL: BC-12-NP A4	
审核CHK'D ANDY		视图方法 PROJECTION			
批准APP'D		比例SCALE: 3: 1		单位UNIT: mm 页码SHEET: 共1页 第1页	