
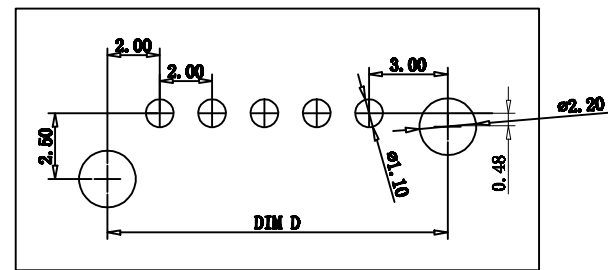
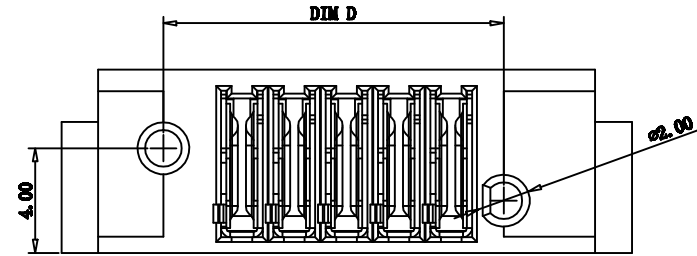

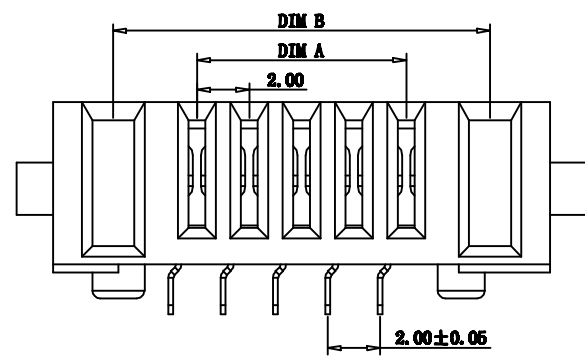


REV.	DESCRIPTION	APPD	DATE

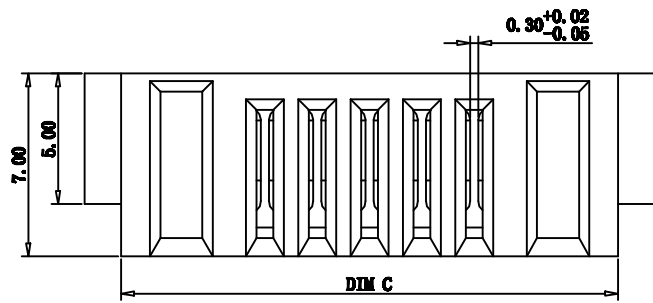

**注解:**

**1. 材料:**

主体 PA46  
端子 C5191

**2. 电镀要求:**

端子镍底, 表面镀金

**3. 使用规格:**

- 3.1 额定电流 7A .
- 3.2 接触阻抗 30mΩ.
- 3.3 绝缘阻抗 100MΩ.
- 3.4 耐压 500V AC/DC.
- 3.5 使用温度 -40°+105°.

**订购须知**

XDCZ-20F1-\*\*\*P

- 05: 5PIN 母座
- 12: 12PIN 母座

**规格表**

PIN	DIM A	DIM B	DIM C	DIM D
5	8.00	14.40	19.00	13.00
12	22.00	28.40	33.00	27.00

<b>DES NO:</b> XDCZ-0612-00F1		<b>MATERIAL:</b>		<b>深圳市连欣科技有限公司</b>	
<b>LOT NO:</b>		<b>FINISH:</b>			
<b>UNIT:</b> MM	<b>SIZE:</b> A4	<b>COLOR:</b>		<b>TITLE:</b> PH2.0MM电池座母座(弯针)	
<b>TOLERANCES:</b> X I=±0.35 X II=±0.25 X III=±0.15		<b>GENERAL ANGLE:</b> X I=±3.0° X II=±2.0°		<b>DR:</b> 刘静	<b>PART NO:</b> XDCZ-20F1-***P
<b>CHK:</b> 刘静		<b>APP:</b> 刘静		<b>REV:</b> A	<b>SCALE:</b> 1:1
<b>SHEET:</b> 1 OF 1					