


直锁

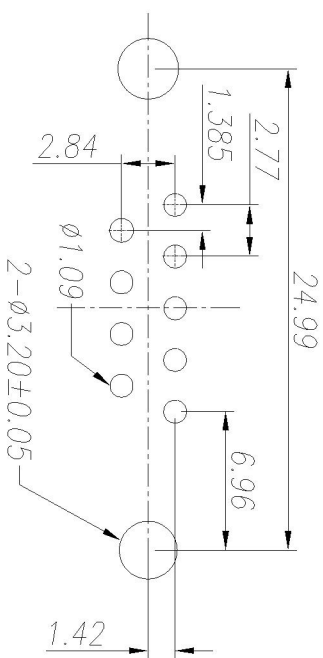

PCB LAYOUT

*.ELECTRIC CHARACTERISTICS:
 CONTACT CURRENT RATING: 3.0A MAX.;
 CONTACT VOLTAGE RATING:100V DC;
 CONTACT RESISTANCE: 30m Ω MAX.;
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC/60S;
 INSULATION RESISTANCE:1000 M Ω MIN./AI- DC 500V.

*.MECHANICAL CHARACTERISTICS:
 DURABILITY: 5000 CYCLES.
 INSERTION AND EXTRACTION FORCE:
 INSERTION FORCE: 50N MAX.
 EXTRACTION FORCE: 15N MIN.



深圳市连欣科技有限公司

TOLERANCE: XX ±0.30 XXX ±0.25 XXXX ±0.15 X' ±2"	DRAWN BY : 陈明	DATE : 2014-02-23	PART NAME: XDDB-1809-048
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY: 叶永清	DATE : 2014-02-23	MOLD NO.:
	APPROVED BY: 柯南	DATE : 2014-02-23	DRAW NO.:
			SHEET NO.:
			1 OF 1