
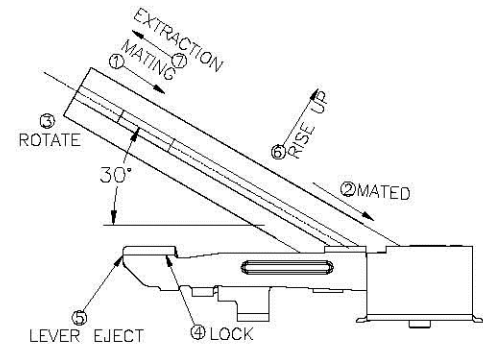
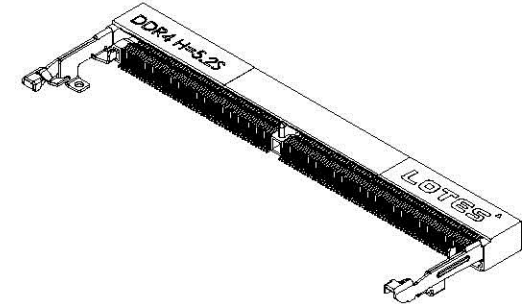

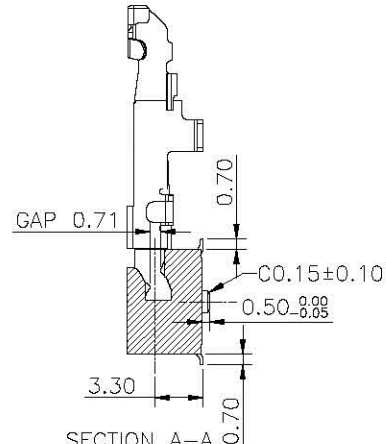
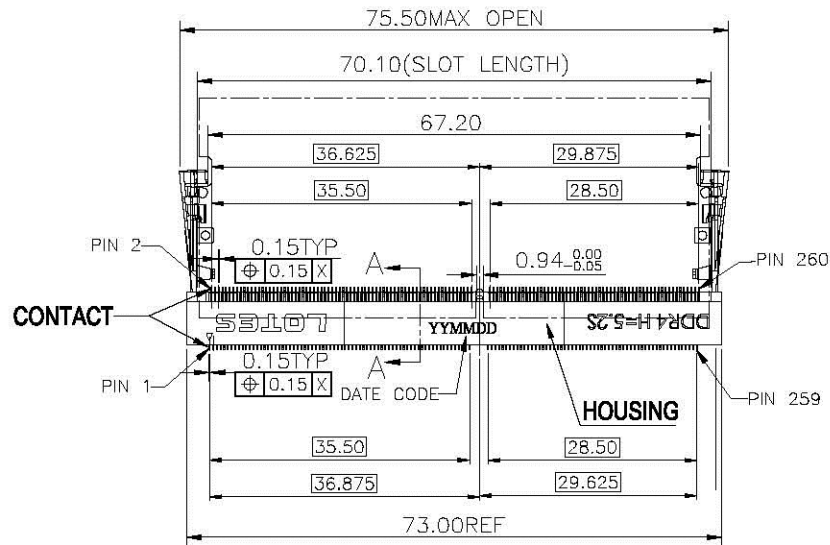
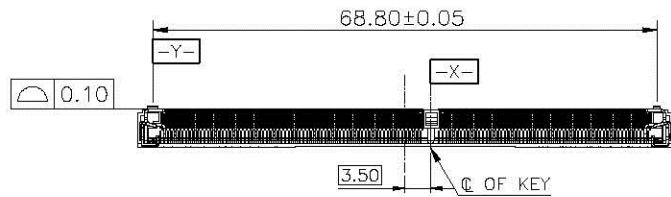


REV.	ECR/N NO./DESCRIPTION	DATE	DRAWN	CHECKED	APPROVE
C	RD140**	05/20'15	XU	Vito	Barney
D	RD140**	08/12'15	XU	Vito	Barney
E	RD140**	09/09'15	XU	Vito	Barney

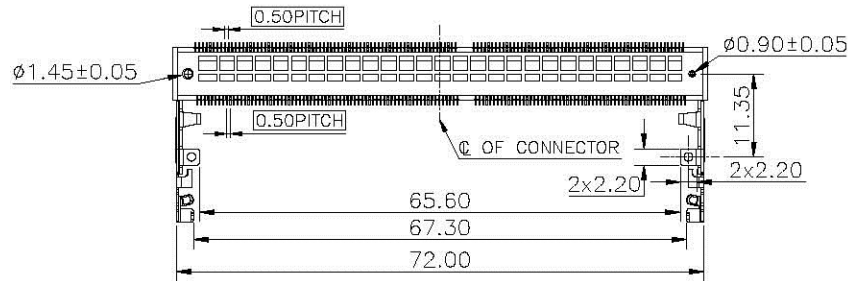

HOW TO MATE AND UNMATE
MATE: ① → ④
UNMATE: ⑤ → ②
SCALE 2:1

GENERAL TOLERANCES
UNLESS SPECIFIED

X ± 0.35	X° ± 3°
.XX ± 0.25	X° ± 2°
.XXX ± 0.15	.XX° ± 1°



深圳市连欣科技有限公司
Shenzhen City Lianxin Technology Co., Ltd

XX± 0.25		X°± 2°	PART NO. XDDR0207-P001		TITLE SODDR4 5.2H 260 PIN STD TYPE		
XXX± 0.15		XX°± 1°					
CUSTOMER DRAWING			CHECKED BY Vito		DWG NO. AP-ADDR0207		
SIZE	UNITS	DRAWN BY XU			SHEET	SCALE	REV
A4	MM[INCH]				1 / 5	1 : 1	E

NOTES:

1.MATERIALS:

HOUSING: LCP,UL 94V-0.

CONTACT: BRASS C2680.

LATCH: STAINLESS STEEL SUS301.

2.FINISH:

1)CONTACT:UNDERPLATED NICKEL 50~150u",
GOLD PLATED ON SOLDER AREA.
GOLD PLATED ON CONTACT AREA.(DETAL SEE TABLE)

2)LATCH:UNDERPLATED NICKEL 50~150u",MATTE TIN 80u" MIN.

3.ELECTRICAL PERFORMANCE

LLCR INITIAL 50mΩ MAX PER CONTACT.

FINAL ΔLLCR=20mΩ MAX

4.MECHANICAL PERFORMANCE,

MATING & UNMATING FORCE: 6.1 Kgf MAX.

5.IR REFLOW:

THE PEAK TEMPRATURE ON THE BOARD SHALL BE
MAINTAINED FOR 10 SECONDS AT 260±5°C.

6. DC: XXXXXX

DATE
WEEK
YEAR


7.PRODUCT NUMBER NOTE:ADDR****-****

PACKING DIRECTION
TYPE SERIAL NUMBER
HALOGEN FREE
PRODUCT SERIAL NUMBER
PRODUCT TYPE
CONNECTOR

8.RoHS COMPLIANT.
HF COMPLIANT.

TABLE:

NO.	PART NO.	COLOR	DESCRIPTION
1	ADDR0207-P001A	BLACK	GOLD G/F ON CONTACT AREA
			GOLD G/F ON SOLDER AREA
2	ADDR0207-P002A	BLACK	GOLD 10u" ON CONTACT AREA
			GOLD G/F ON SOLDER AREA
3	ADDR0207-P003A	BLACK	GOLD 15u" ON CONTACT AREA
			GOLD G/F ON SOLDER AREA
4	ADDR0207-P004A	BLACK	GOLD 30u" ON CONTACT AREA
			GOLD G/F ON SOLDER AREA

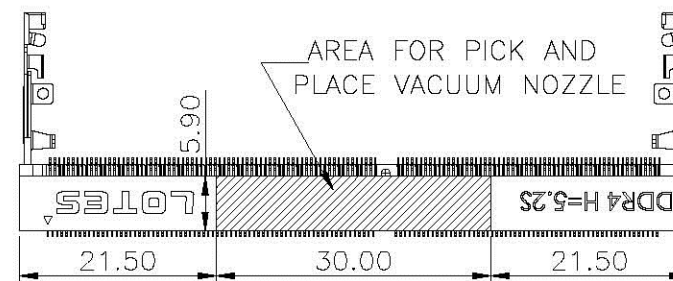


GENERAL TOLERANCES
UNLESS SPECIFIED

X± 0.35	X°± 3°
.XX± 0.25	X°± 2°
.XXX± 0.15	.XX°± 1°



深圳市连欣科技有限公司
Shenzhen City Lianxin Technology Co., Ltd


PART NO. XDDR0207-P001		TITLE SODDR4 5.2H 260 PIN STD TYPE		
CHECKED BY Vito		DWG NO. AP-ADDR0207		
SIZE A4	UNITS MM[INCH]	DRAWN BY XU	SHEET 2 / 5	SCALE 5 : 4
			REV E	

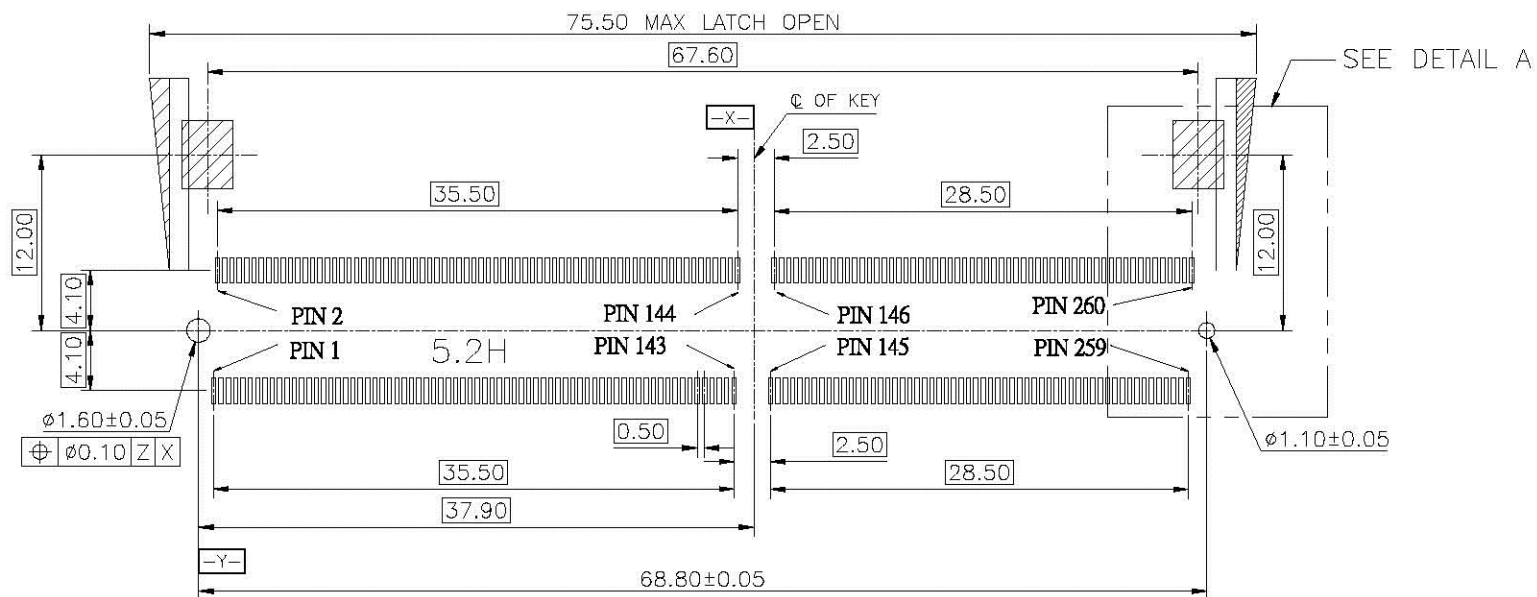


SCALE 2:1


TOP VIEW


RECOMMEND PCB LAYOUT (STANDARD)
THE TOLERANCES UNLESS SPECIFIED IS $\pm 0.05\text{MM}$




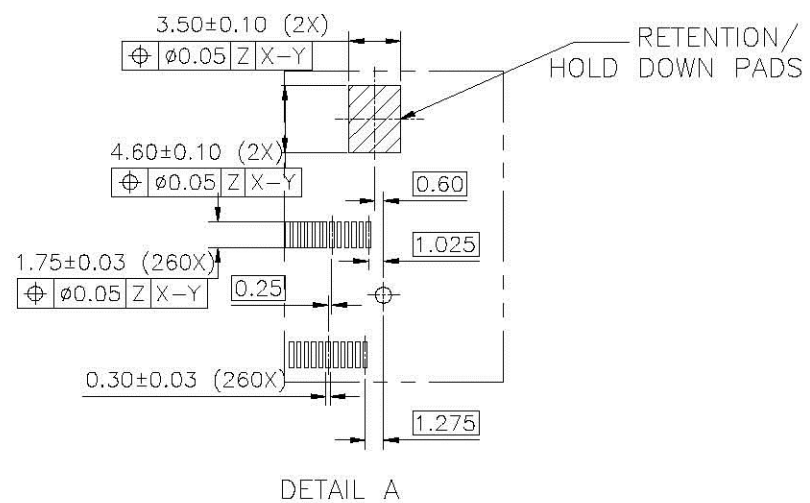


DETAIL A

GENERAL TOLERANCES UNLESS SPECIFIED			深圳市连欣科技有限公司				
			Shenzhen City Lianxin Technology Co., Ltd				
X± 0.35	X°± 3°		PART NO.		TITLE		
XX± 0.25	X°± 2°		XDDR0207-P001		SODDR4 5.2H 260 PIN STD TYPE		
XXX±0.15	XX°±1°						
CUSTOMER DRAWING		CHECKED BY Vito		DWG NO. AP-ADDR0207			
SIZE	UNITS	DRAWN BY			SHEET	SCALE	REV
A4	MM[INCH]	XU			3 / 5	1 : 1	E

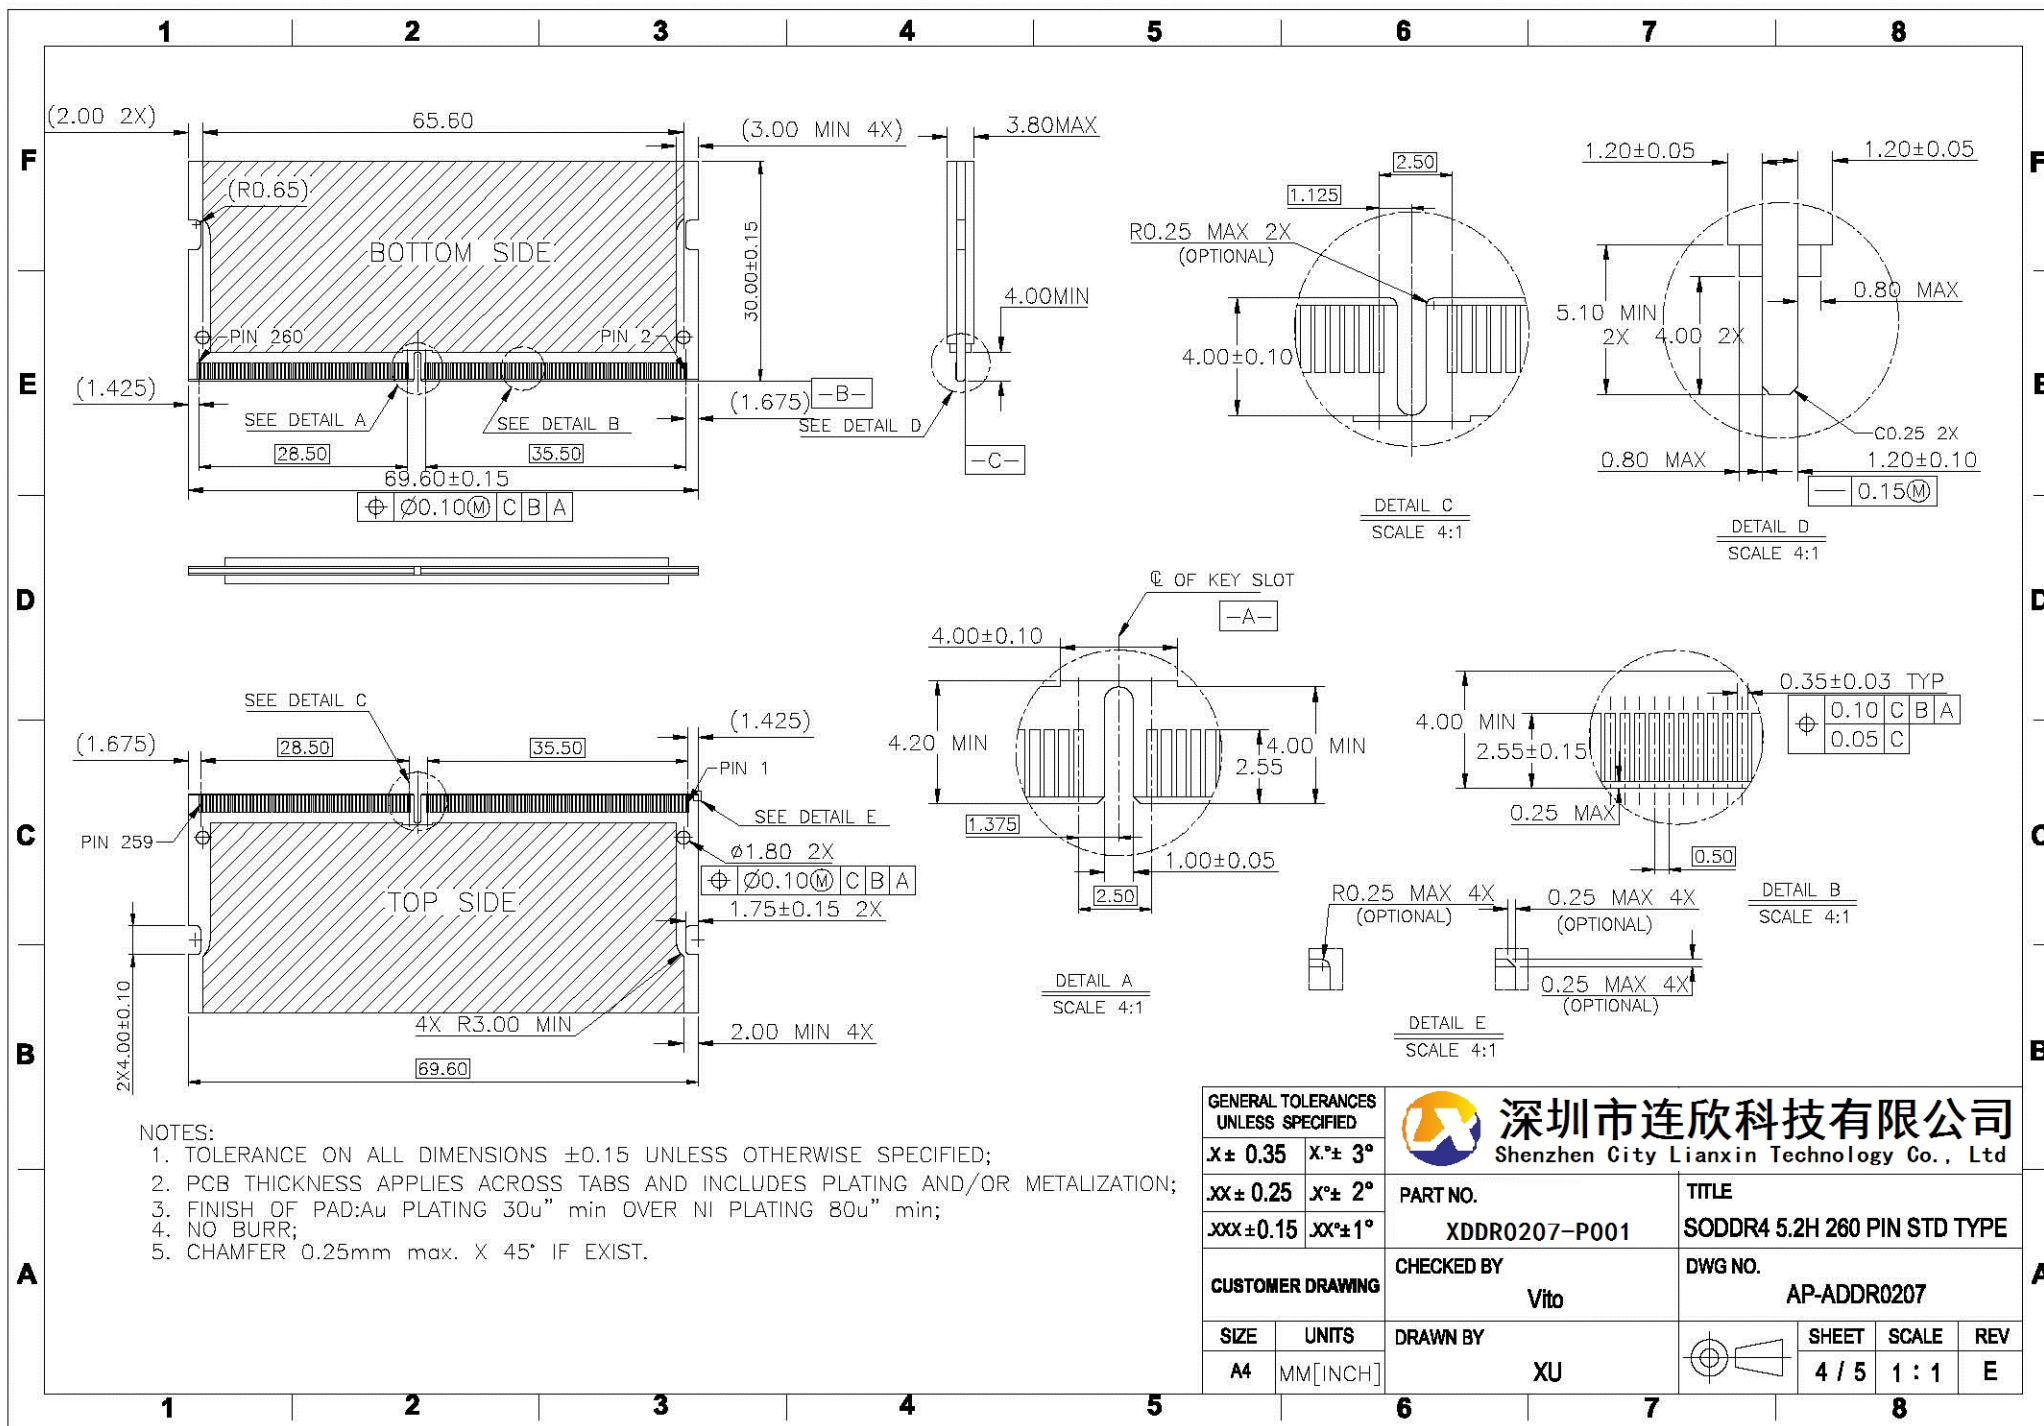

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市连欣科技有限公司 Shenzhen City Lianxin Technology Co., Ltd			
$X \pm 0.35$	$X^\circ \pm 3^\circ$	PART NO. XDDR0207-P001		TITLE SODDR4 5.2H 260 PIN STD TYPE	
$.XX \pm 0.25$	$X^\circ \pm 2^\circ$				
$.XXX \pm 0.15$	$.XX^\circ \pm 1^\circ$	CHECKED BY Vito		DWG NO. AP-ADDR0207	
CUSTOMER DRAWING		DRAWN BY XU		 SHEET 4 / 5 SCALE 1 : 1 REV E	
SIZE A4	UNITS MM[INCH]				

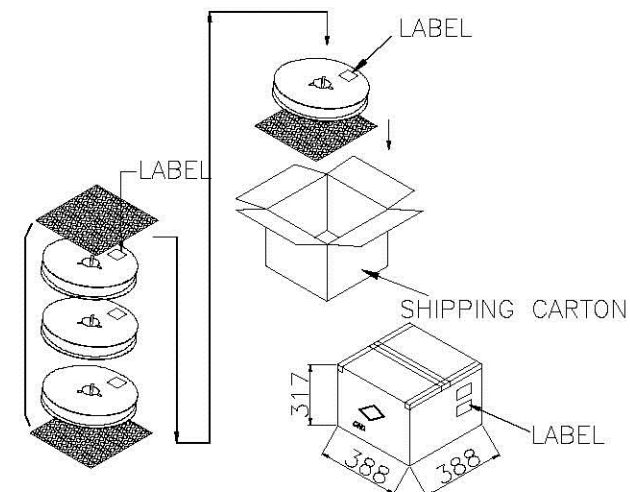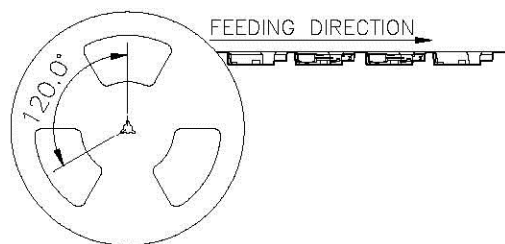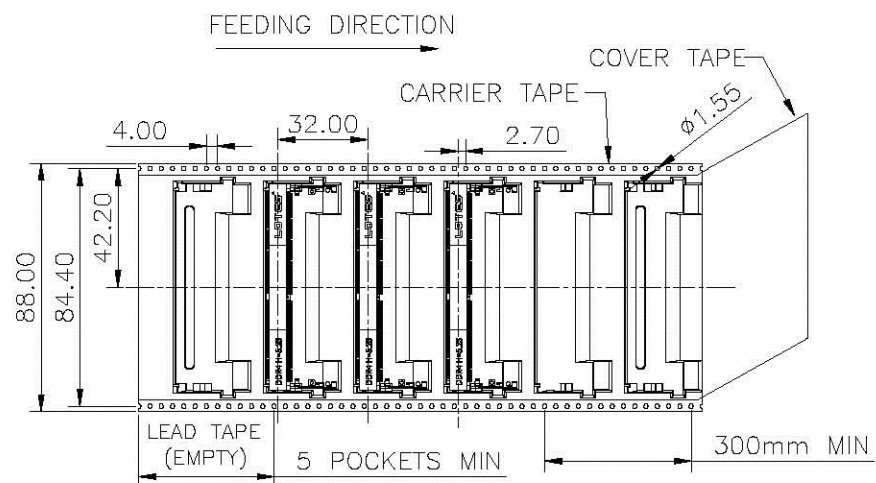

NOTES:

- MATERIAL :
 - CARRY TAPE: PS
 - COVER TAPE: PET
 - SHIPPING CARTON: CORRUGATED FIBER
- DIMENSION :
 - REEL: W=88.0, $\phi A=380$
 - SHIPPING CARTON: L=388, W=388, H=317 (INNER)
- QUANTITY :
 - PRIMARY PACKING: 300 PCS/REEL
 - SECONDARY PACKING: 3 REELS/CARTON(900PCS)
- PEELING RESISTANCE: 20gf~120gf.
- PEELING SPEED: 300mm/minutes.

GENERAL TOLERANCES
UNLESS SPECIFIED

X $\pm$ 0.35	X° $\pm$ 3°
.XX $\pm$ 0.25	X° $\pm$ 2°
.XXX $\pm$ 0.15	.XX° $\pm$ 1°



深圳市连欣科技有限公司
Shenzhen City Lianxin Technology Co., Ltd

PART NO.		TITLE			
XDDR0207-P001		SODDR4 5.2H 260 PIN STD TYPE			
CHECKED BY		DWG NO.			
Vito		AP-ADDR0207			
SIZE	UNITS	DRAWN BY		SHEET	SCALE
A4	MM[INCH]	XU		5 / 5	N/A
				REV	E