



SPECIFICATIONS (规格)

- Voltage Rating (额定电压): 250V AC, DC
- Current Rating (额定电流): 5A ~ 8A AC, DC
- Withstanding Voltage (耐电压): 1500V AC/minute
- Insulation Resistance (绝缘电阻): 1000MΩ min
- Temperature Range (工作温度): -45° C ~ +85° C
- Contact Resistance (接触电阻): 10mΩ max
- Applicable wire: AWG#24-#28
- Material: Brass or Phosphor Bronze
- Finish: Tin plated
- Q' ty: 10000 pcs/Reel

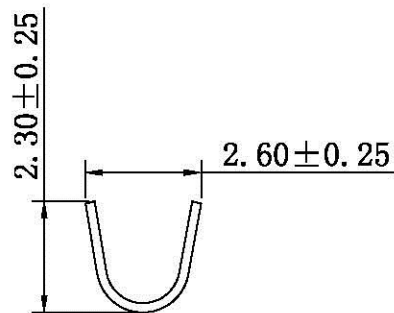

SEC A-A

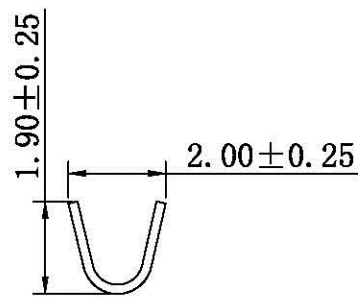

SEC B-B

RoHS Compliant

L&X 深圳市连欣科技有限公司

一般公差 GENERAL TOLERANCE:	.0 ± 0.20 .00 ± 0.15 .000 ± 0.05	投影法 Projection		品名 (PART NAME)	Pitch 3.0mm 低脚 母Terminal
绘图/DR	chen	单位 Unit	MM	料号 (PART NO)	XDWF-C3030MT
核准/APPD	陈旺	比例 Scale	1/1		
日期/DATE	2015-7-17	版本 Rev	A		

REV.	变更内容/DESCRIPTION	日期/DATE	BY
A	新规格作成	2015-7-17	chen